

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT

CAUTION

Put on gloves to protect your hands.


Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Using a remover, remove the roof side molding (A).

Information

Always replace the roof side molding with a new one.

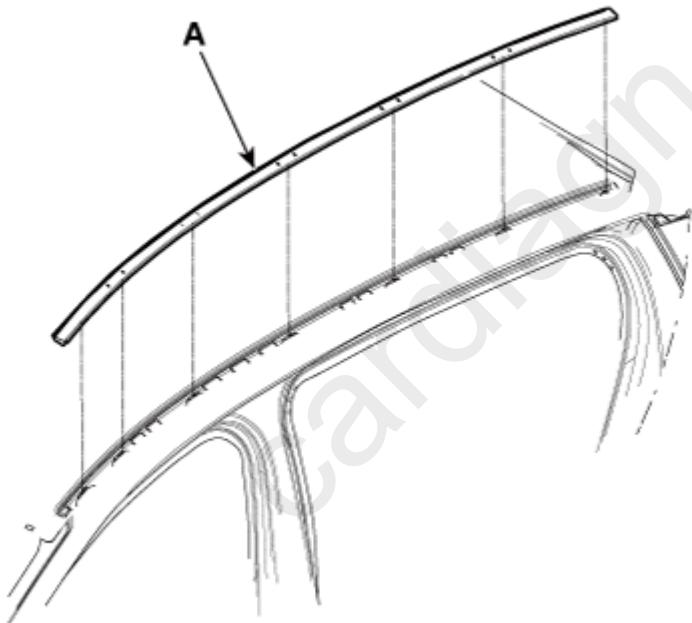

2. Install in the reverse order of removal.

Information

Replace any damaged clips.

* Thanks for your cooperation for the more quality. Please surely rate this document before closing.