

Please rate this document after reviewing at the bottom of this page.

## REPLACEMENT


### CAUTION

Put on gloves to protect your hands.

### Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Loosen the side sill molding mounting screws.
2. Using a remover, remove the side sill molding (A).

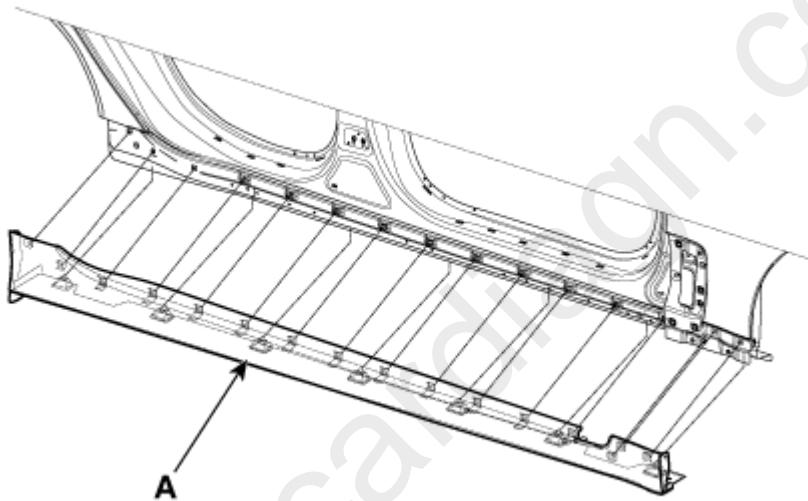

3. Install in the reverse order of removal.

### Information

Replace any damaged clips.

\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.