

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT


⚠ CAUTION

Put on gloves to protect your hands.


ℹ Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the crash pad side cover [LH] (A) by using a remover.

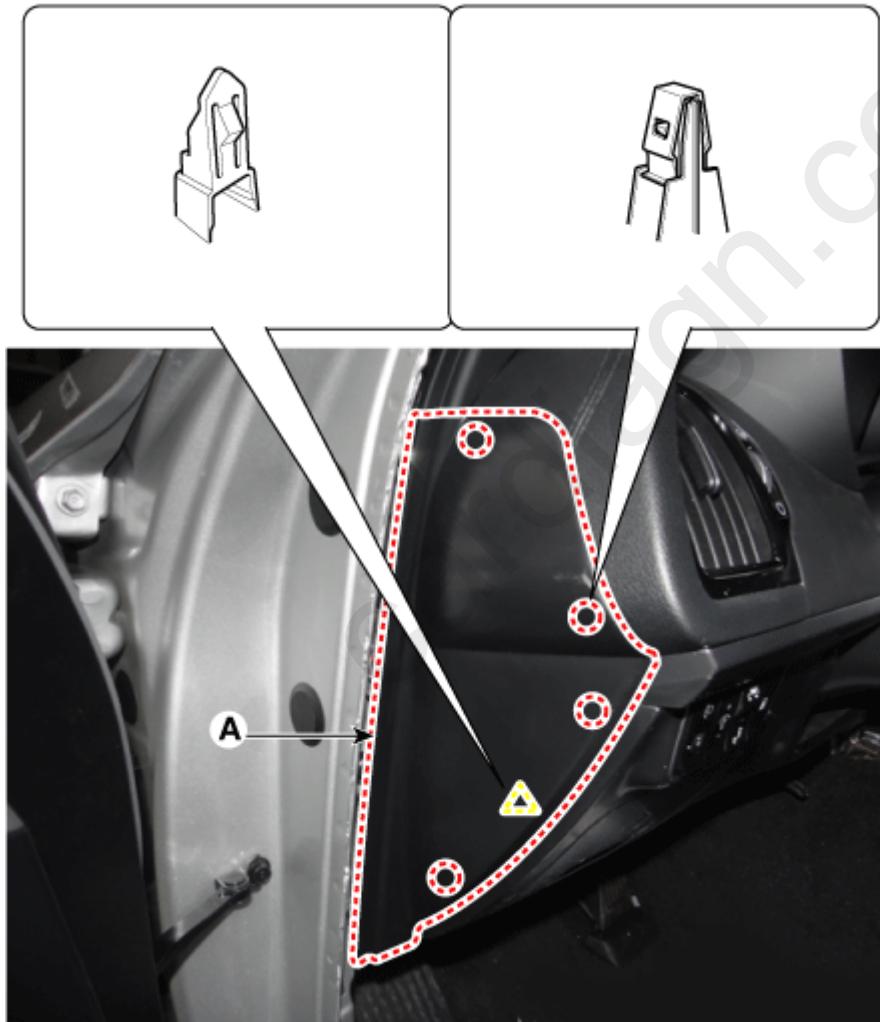

2. Separate the crash pad lower panel (A) after loosening the bolts and screws.

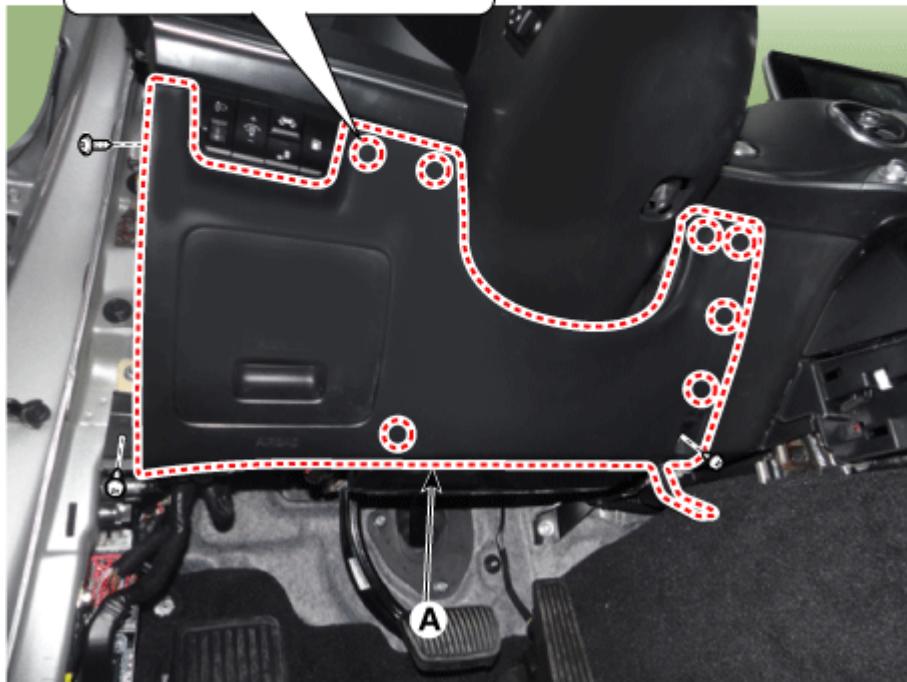

3. Disconnect the crash pad lower switch connector (A).



4. Install in the reverse order of removal.

 **Information**

- Make sure the connector are connected in properly.
- Replace any damaged clips.

* Thanks for your cooperation for the more quality. Please surely rate this document before you leave.

English

Cardiagn.Com