

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT


⚠ CAUTION

Put on gloves to protect your hands.

ℹ Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.


1. Remove the crash pad side cover [RH] (A) by using a remover.

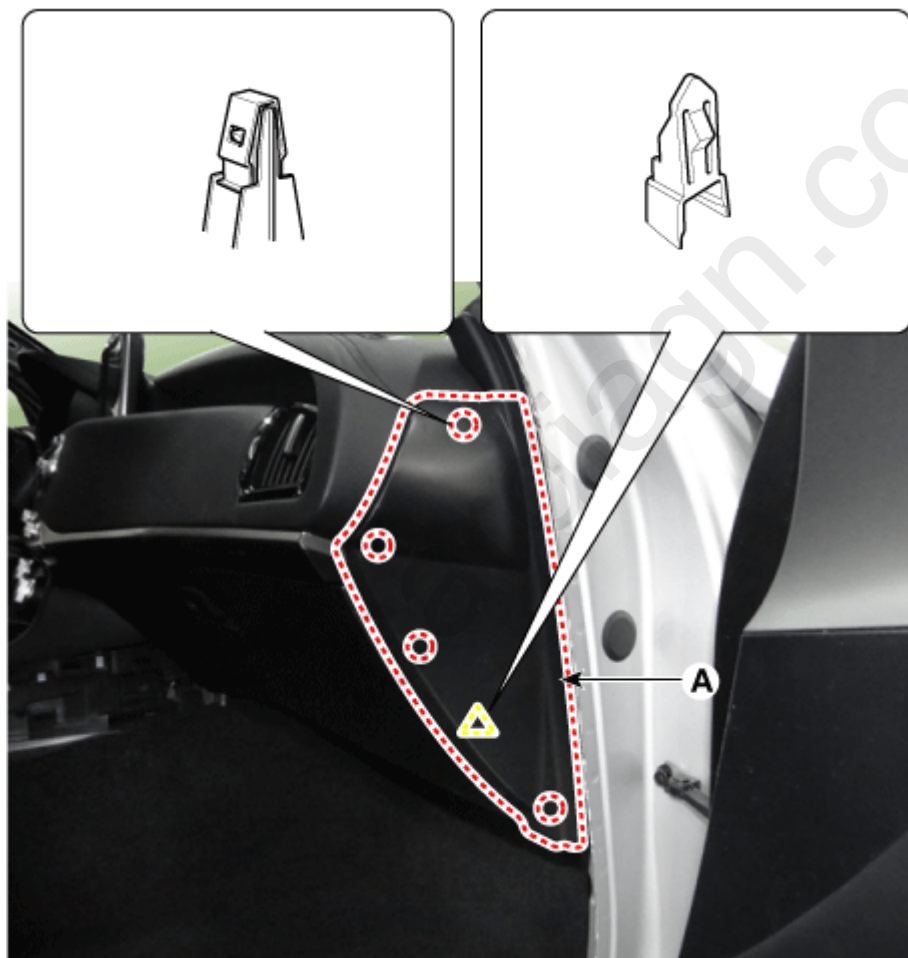

2. Remove the crash pad garnish [RH] (A) after loosening the mounting screws.



3. Separate the crash pad passenger side panel (A) after loosening the mounting screws.

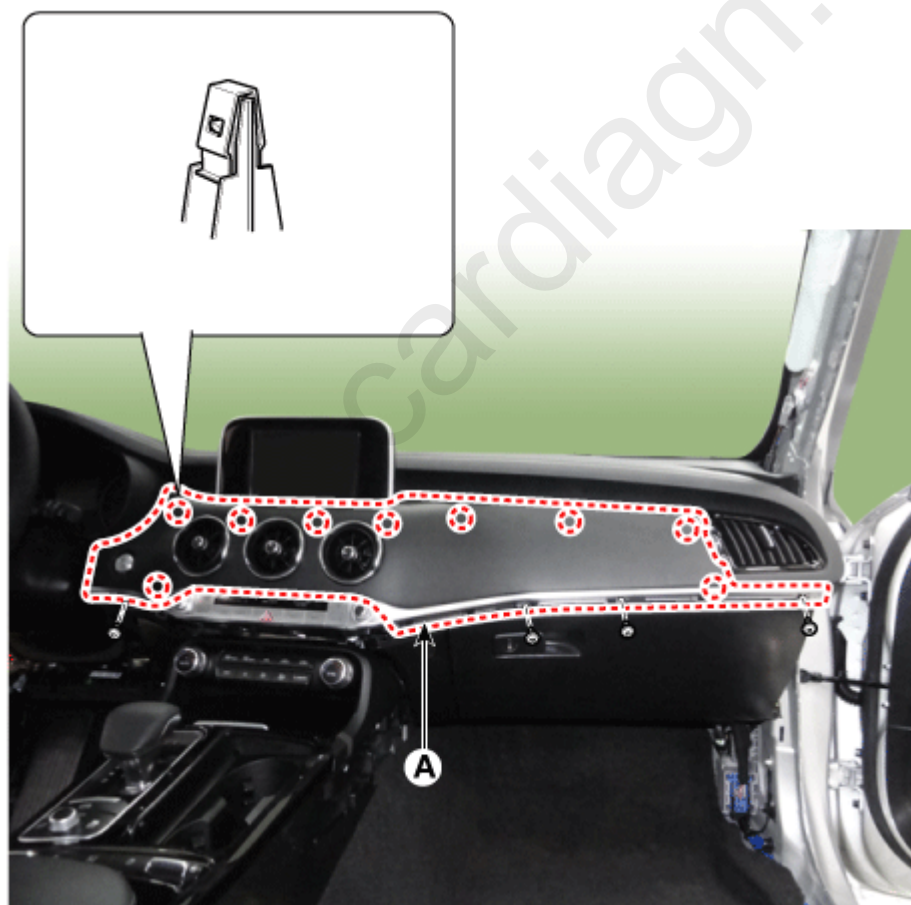

4. Disconnect the start/stop button connector (A) and then remove the crash pad garnish.



5. Install in the reverse order of removal.

i Information

- Make sure the connector are connected in properly.
- Replace any damaged clips.

*** Thanks for your cooperation for the more quality. Please surely rate this document before closing.**