

Please rate this document after reviewing at the bottom of this page.

## REPLACEMENT


### NOTICE

Be careful not to damage the fender and body.


### Information

When removing the clips, use a clip remover.

1. Remove the front bumper.  
[\(Refer to Front Bumper - "Front Bumper Assembly"\)](#)
2. Remove the headlamps.  
[\(Refer to Body Electrical System - "Headlamps"\)](#)
3. Remove the side sill molding.  
[\(Refer to Body Side Molding - "Side Sill Molding"\)](#)
4. Remove the front wheel guard.  
[\(Refer to Body Side Molding - "Front Wheel Guard"\)](#)
5. Remove the fender garnish.  
[\(Refer to Body Side Molding - "Fender Garnish"\)](#)
6. Remove the front bumper side mounting bracket (A) after loosening the screw and bolt.

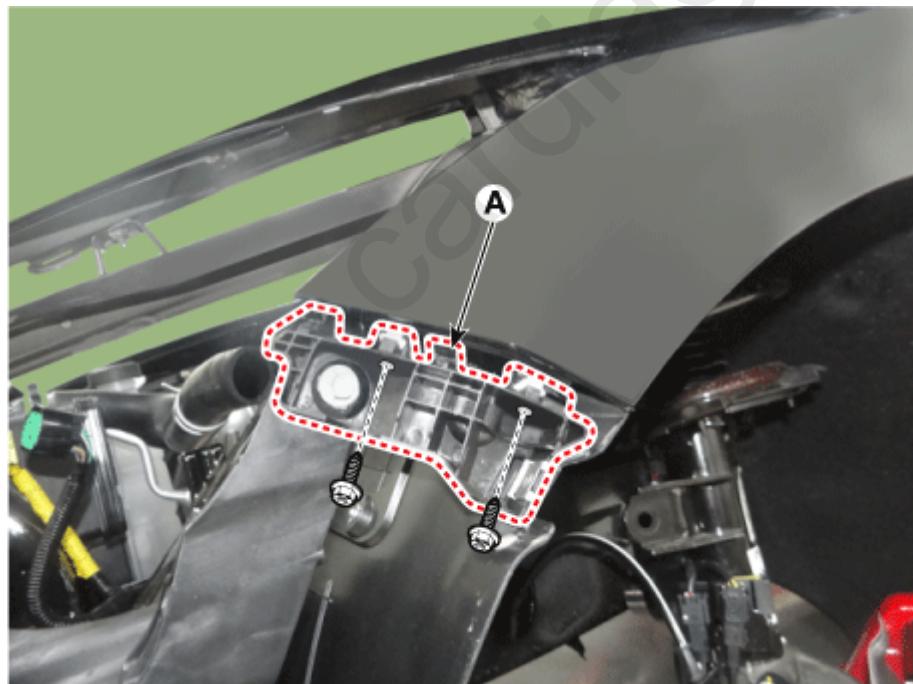

7. Remove the fender assembly (A) after loosening the nut and bolts.

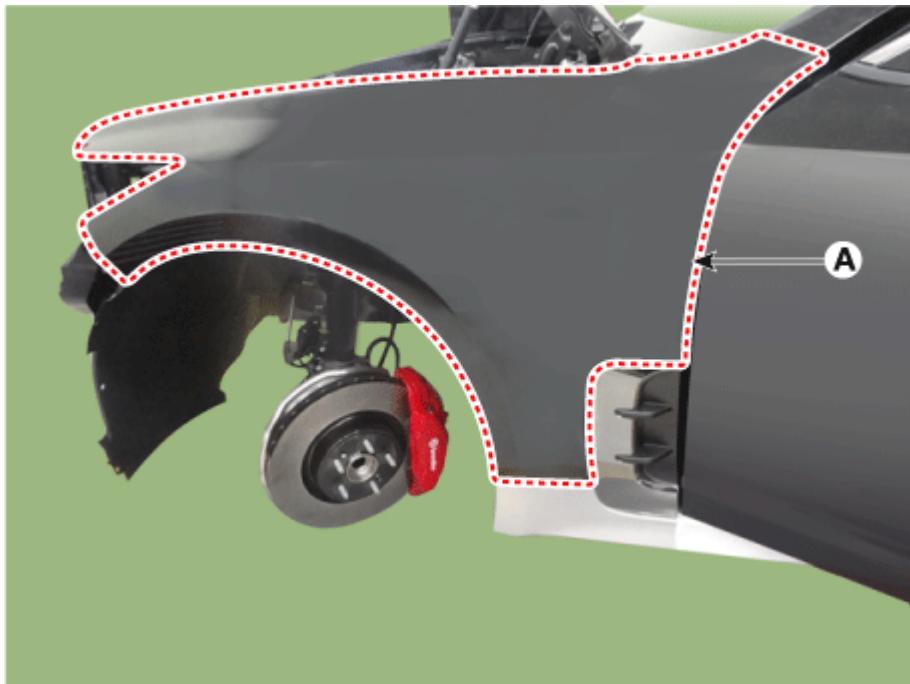

8. Install in the reverse order of removal.

 **Information**

Replace any damaged clips.

\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.