

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT


CAUTION

Put on gloves to protect your hands.


NOTICE

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the console assembly.
(Refer to Floor console - "Floor Console Assembly")
2. Remove the rear console bracket (A) after loosening the console lower side mounting screws.

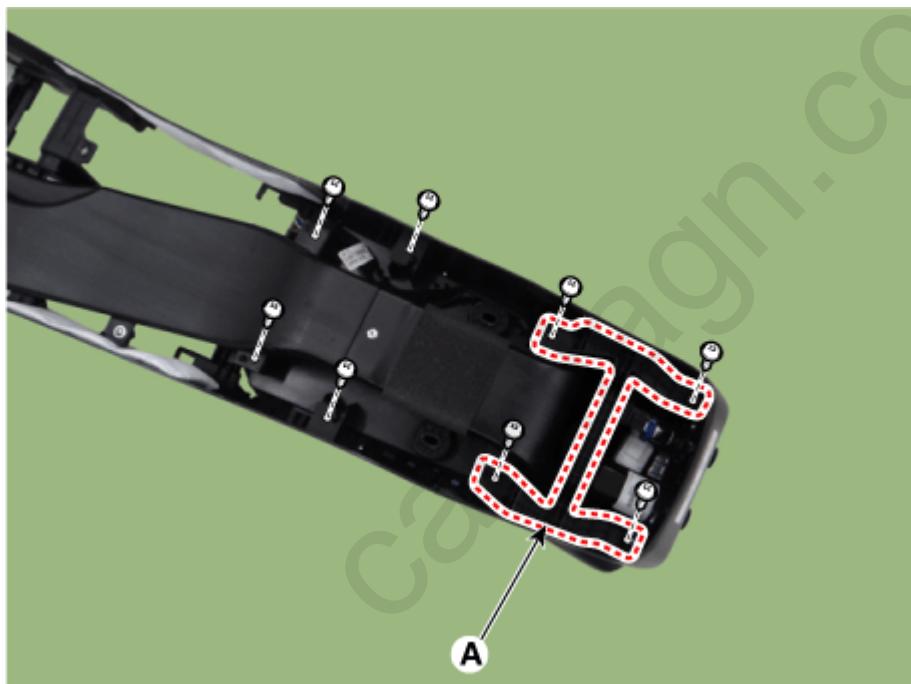

3. Remove the console storage box & armrest(A) after loosening the mounting screws.

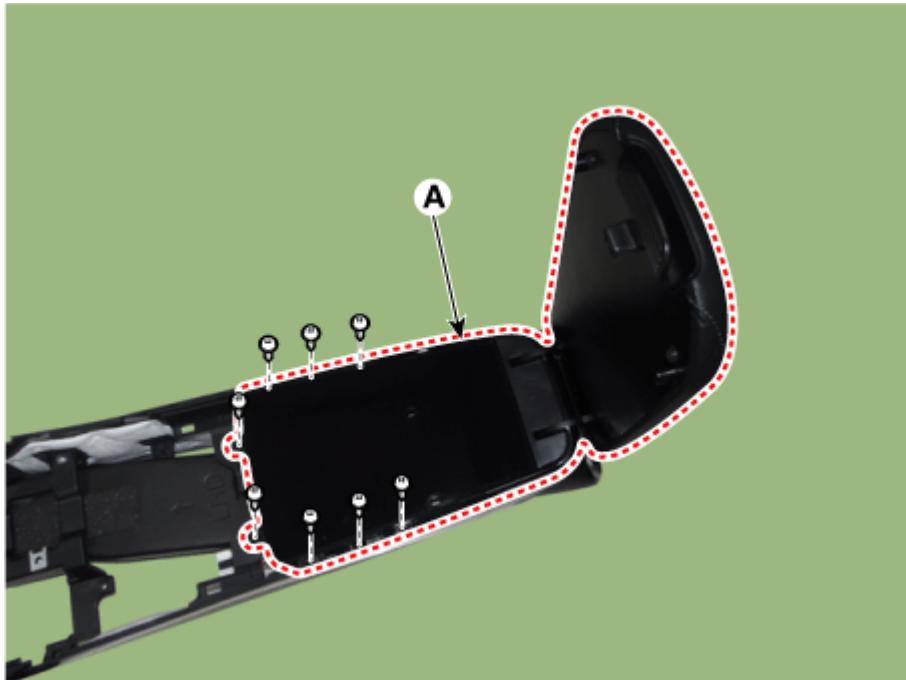

4. Remove the console armrest(A) after loosening the mounting screws.



5. Install in the reverse order of removal.

 **Information**

- Make sure the connector are connected in properly.
- Replace any damaged clips.

*** Thanks for your cooperation for the more quality. Please surely rate this document before closing.**