

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT

CAUTION

Put on gloves to protect your hands.

NOTICE

- When prying with a flat-tip screwdriver or using a prying trim tool, wrap protective tape around the tool and related parts to prevent damage.
- Be careful not to scratch the door trim and other parts.


1. Remove the front door inside handle cap (A) by using a remover.



2. Remove the front door inside pull handle cap (A) by using a remover.




3. Separate the front door inside pull handle mounting cap (A).

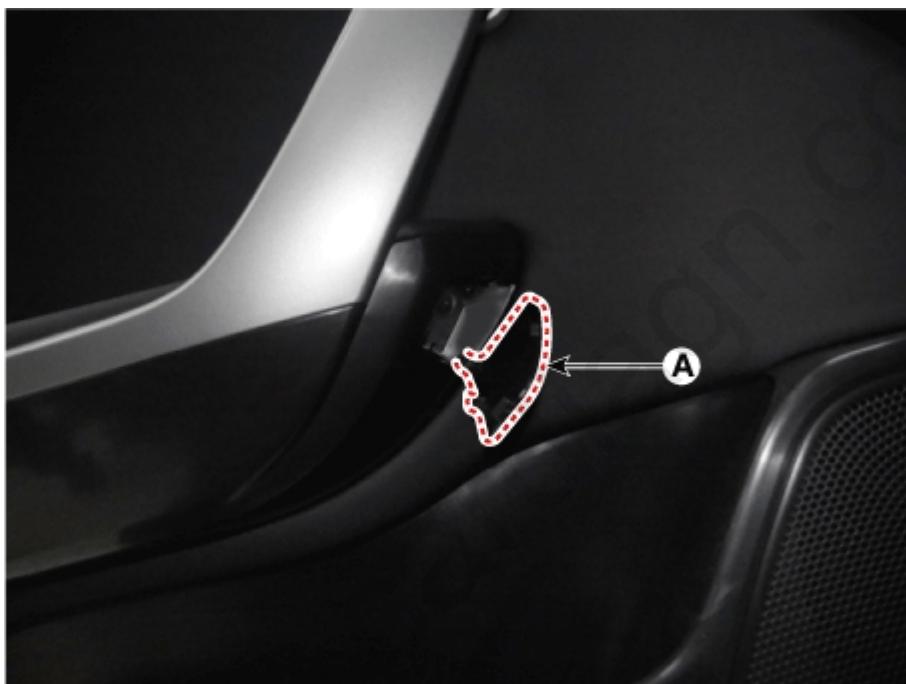


4. Remove the front door trim (A) after loosening the mounting screws.



5. Remove the front door inside handle cage (A).

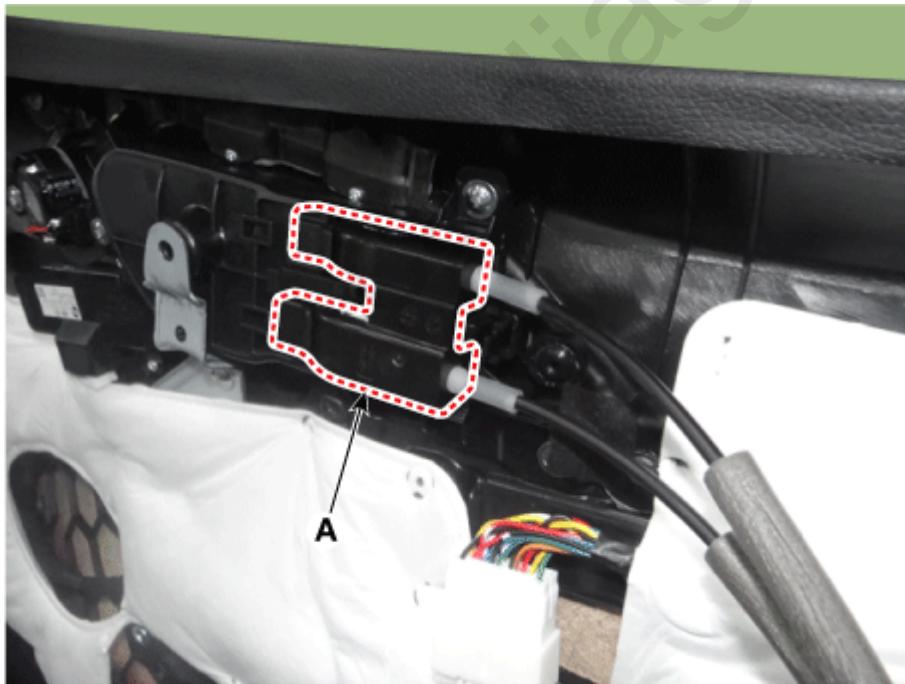

6. Disconnect the front door intergration connector (A).

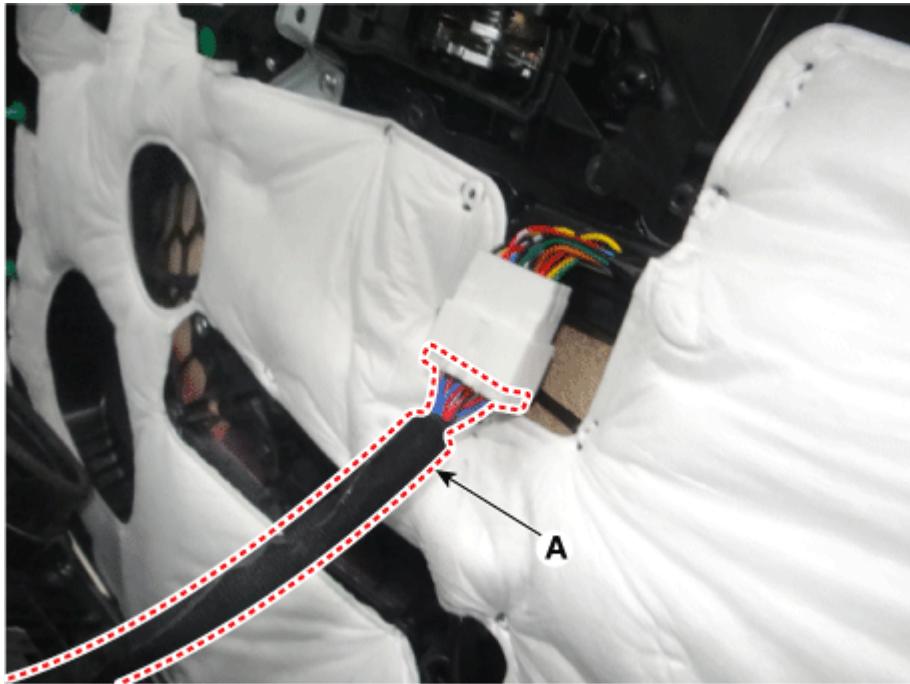

7. Install in the reverse order of removal.

 **Information**

- Make sure that the connector is connected properly.
- Make sure that the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.

* **Thanks for your cooperation for the more quality. Please surely rate this document before closing.**