

Please rate this document after reviewing at the bottom of this page.

## REPLACEMENT


### CAUTION

Put on gloves to protect your hands.


### NOTICE

- When prying with a flat-tip screwdriver or using a prying trim tool, wrap protective tape around the tool and related parts to prevent damage.
- Be careful not to scratch the door trim and other parts.


1. Pull down front door window glass by pressing the power window glass switch.
2. Remove the front door trim.  
**(Refer to Front Door - "Front Door Trim")**
3. Remove the front door frame inner cover (A) by using a remover.

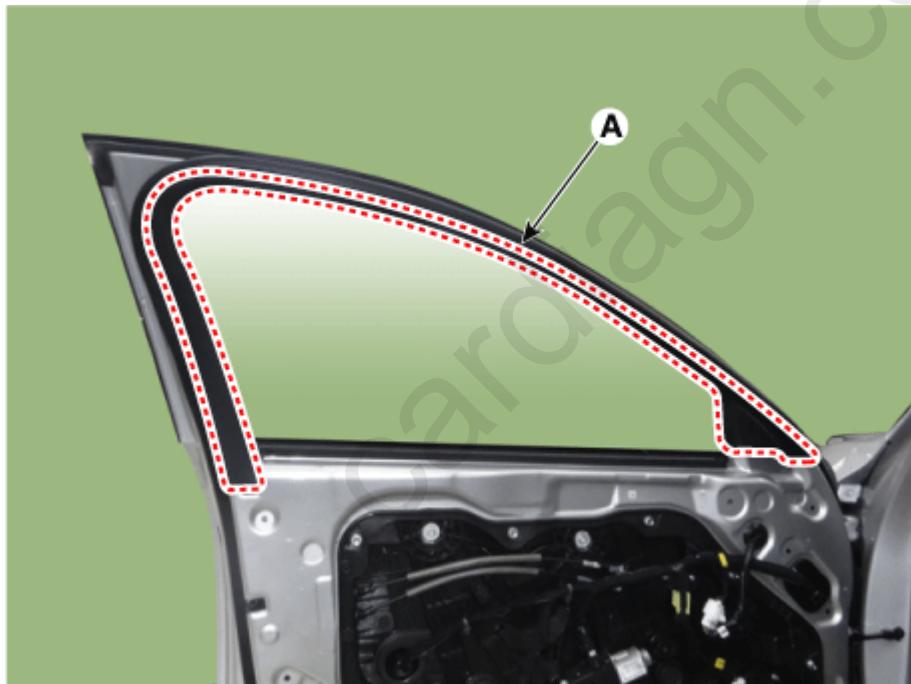

4. Remove the front door quadrant inner cover (B) after loosening the mounting screws (A).

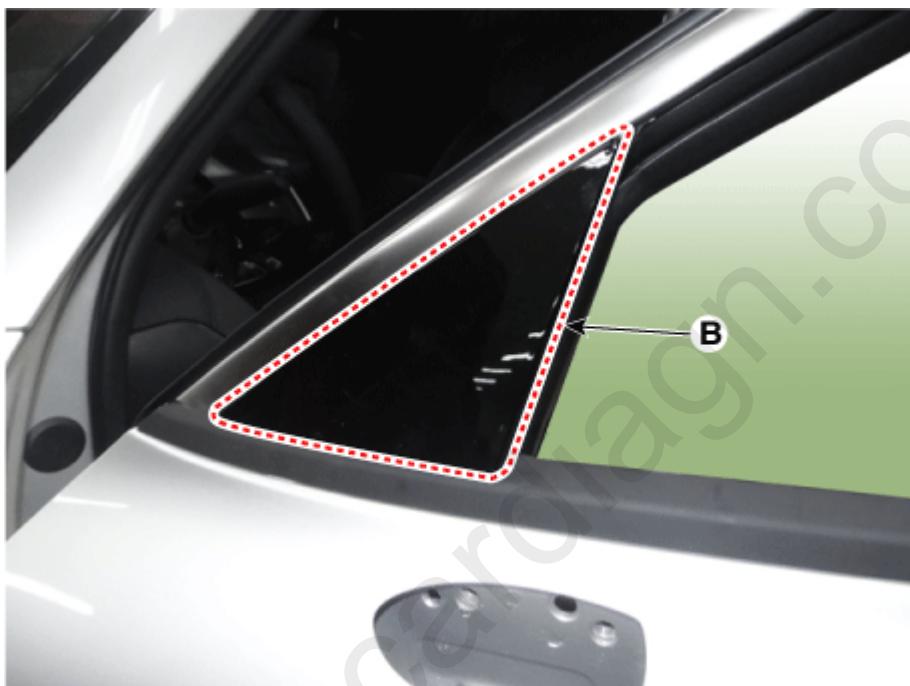

5. Remove the front door belt inside weatherstrip (A).

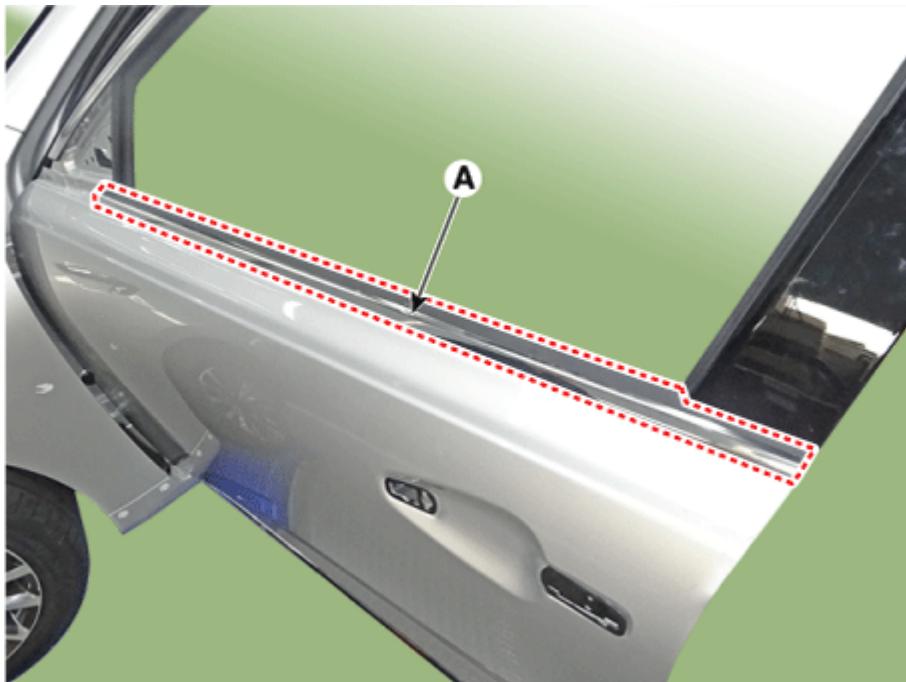

6. Install in the reverse order of removal.

 **Information**

- Make sure the connector is connected properly.
- Make sure the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.

\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.