

Please rate this document after reviewing at the bottom of this page.

## REPLACEMENT


### CAUTION

Put on gloves to protect your hands.

### Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the front door trim.  
**(Refer to Front Door - "Front Door Trim")**
2. Remove the front door belt inside weatherstrip (A).

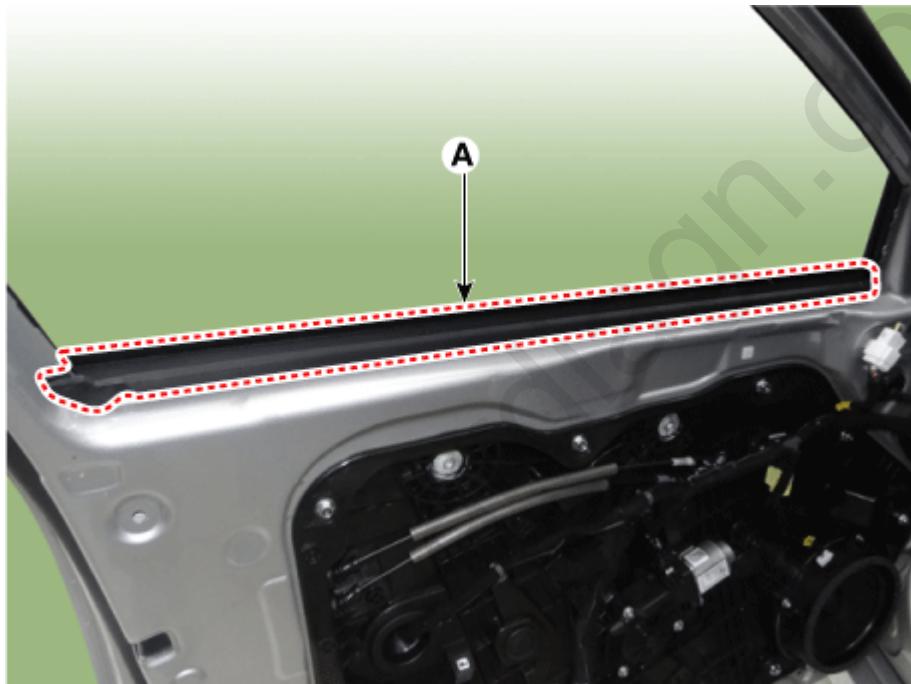

3. Install in the reverse order of removal.

### Information

- Make sure the connector is connected properly.
- Make sure the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.

**\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.**