

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT


⚠ CAUTION

Put on gloves to protect your hands.

i Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the front seat forward extension cover (A).

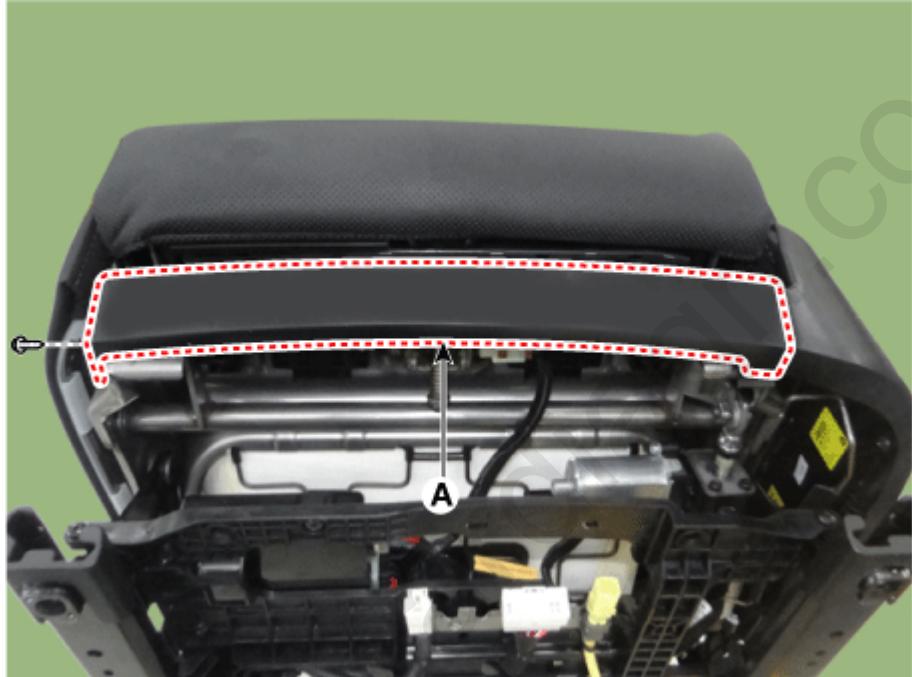

2. Remove the front seat outer shield cover (A) by using a remover.

NOTICE

Be careful not to damage the mounting bracket and hook when removing the cover..



3. Disconnect the front seat power switch connector (A).



4. Install in the reverse order of removal.

 **Information**

Make sure that the connectors are plugged in properly.

*** Thanks for your cooperation for the more quality. Please surely rate this document before closing.**