


Please rate this document after reviewing at the bottom of this page.

REPLACEMENT

1. After loosening the mounting screw, remove the hood latch release handle (A).

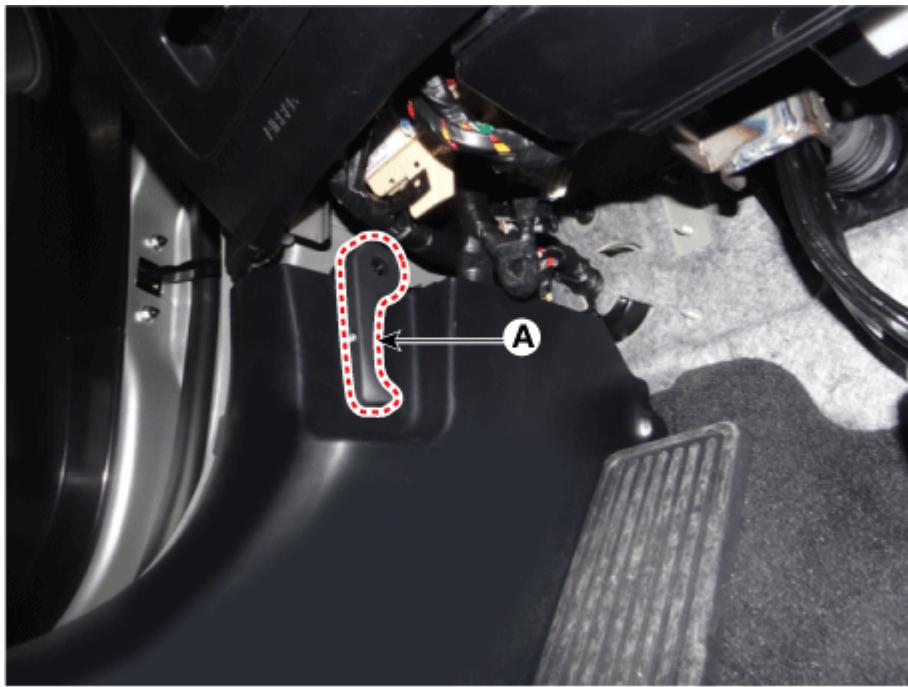

2. Install in the reverse order of removal.

 **Information**

- Make sure that the hood latch cable is connected properly.
- Make sure that the hood locks/unlocks and opens/closes properly.

* Thanks for your cooperation for the more quality. Please surely rate this document before closing.