

Please rate this document after reviewing at the bottom of this page.

## REPLACEMENT

### CAUTION

Put on gloves to protect your hands.


### Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the rear door inside handle cover (A) by using a remover.




2. Remove the rear door pull handle cap (A) by using a remover.

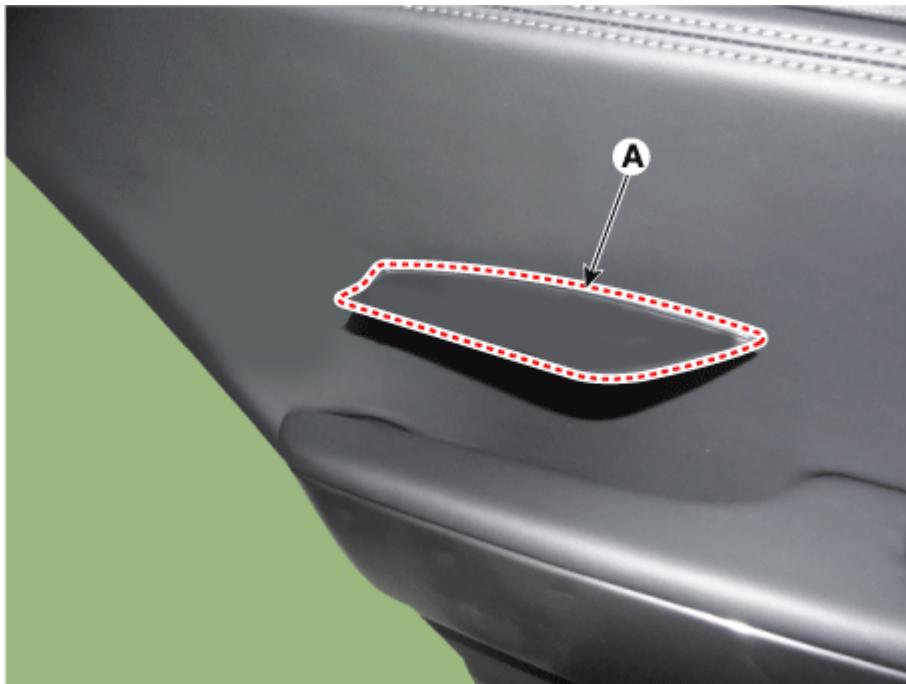


3. Remove the rear door trim (A) after loosening the mounting screw.



4. Remove the rear door inside handle cage (A).

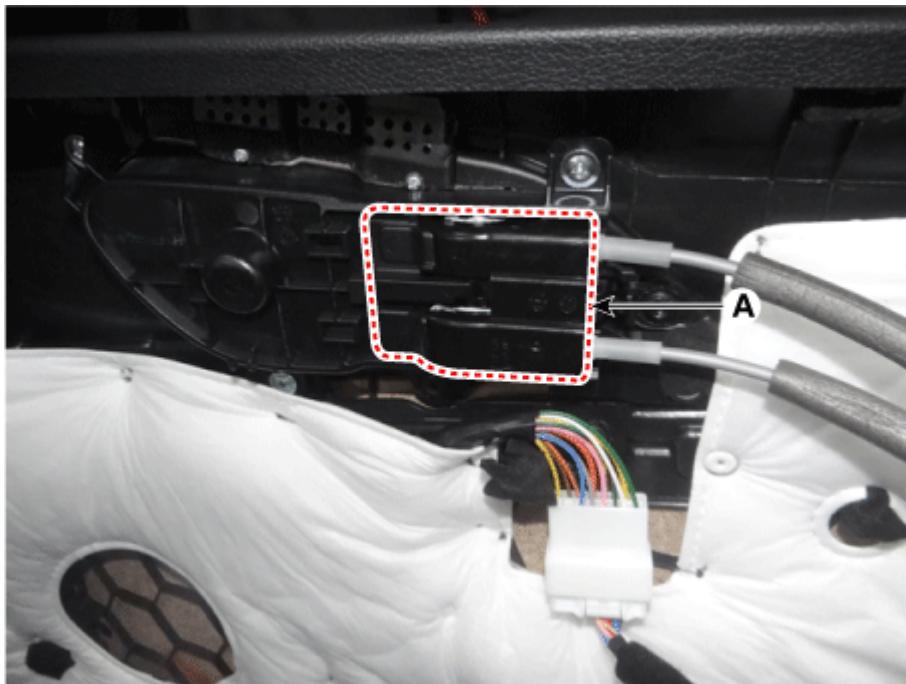

5. Disconnect the power window switch connector (A) and rear door tweeter speaker (B).

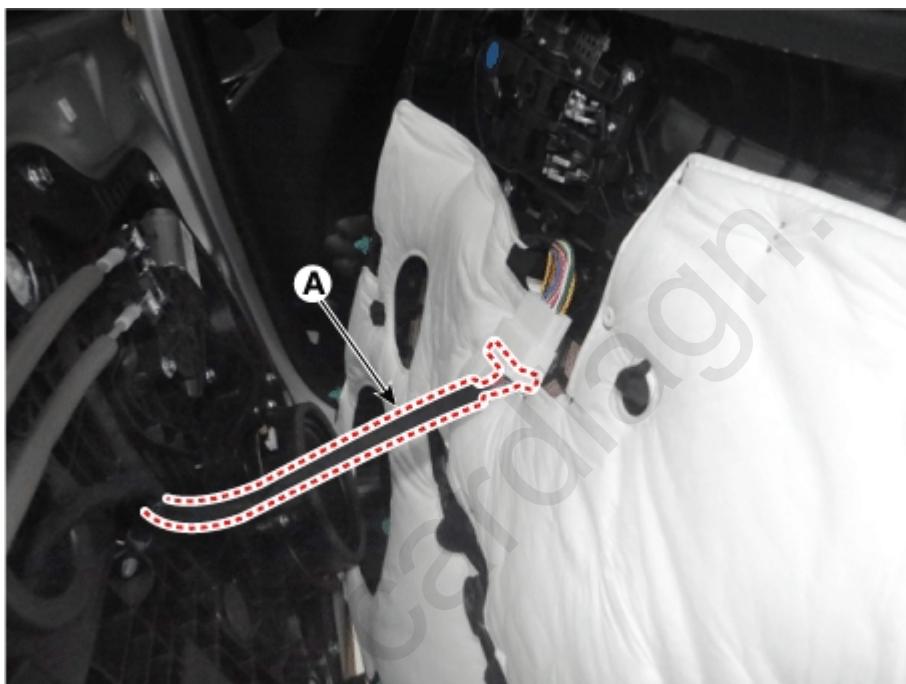

6. Install in the reverse order of removal.

 **Information**

- Make sure that the connector is connected properly.
- Make sure that the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.

**\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.**