


Please rate this document after reviewing at the bottom of this page.

REPLACEMENT

1. Remove the rear door trim.
(Refer to Rear Door - "Rear Door Trim")
2. Remove the rear door inside handle (A) after loosening mounting screws.

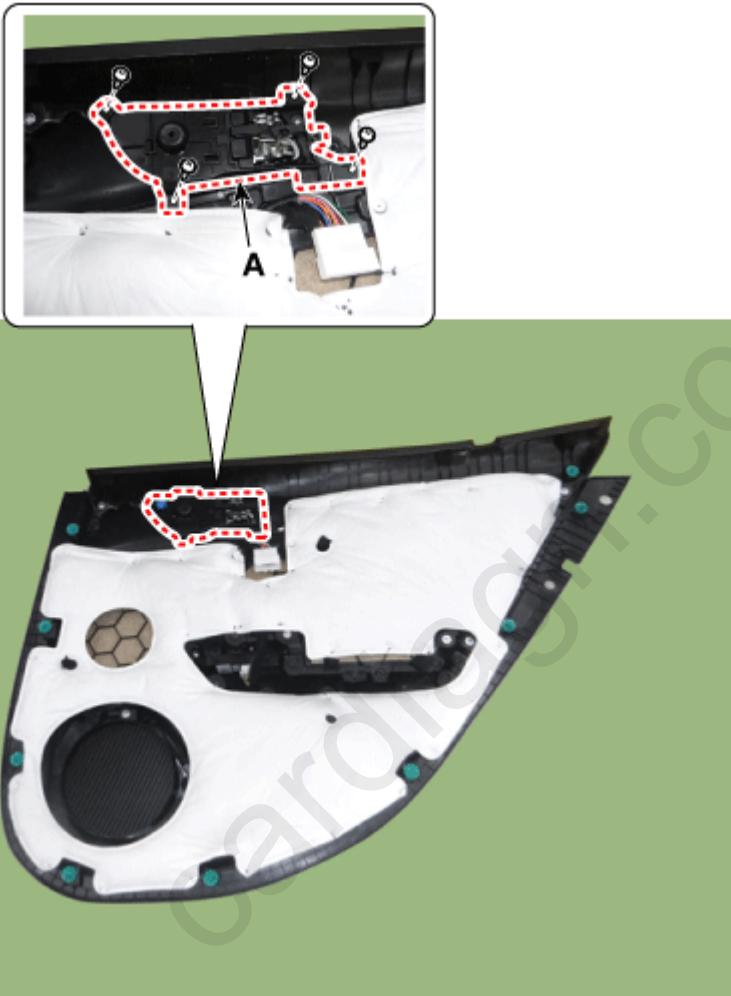

3. Install in the reverse order of removal.

Information

- Make sure that the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.

* Thanks for your cooperation for the more quality. Please surely rate this document before closing.