


Please rate this document after reviewing at the bottom of this page.

REPLACEMENT

1. Remove the rear door trim.
(Refer to Rear Door - "Rear Door Trim")
2. Remove the rear door belt inside weatherstrip (A).

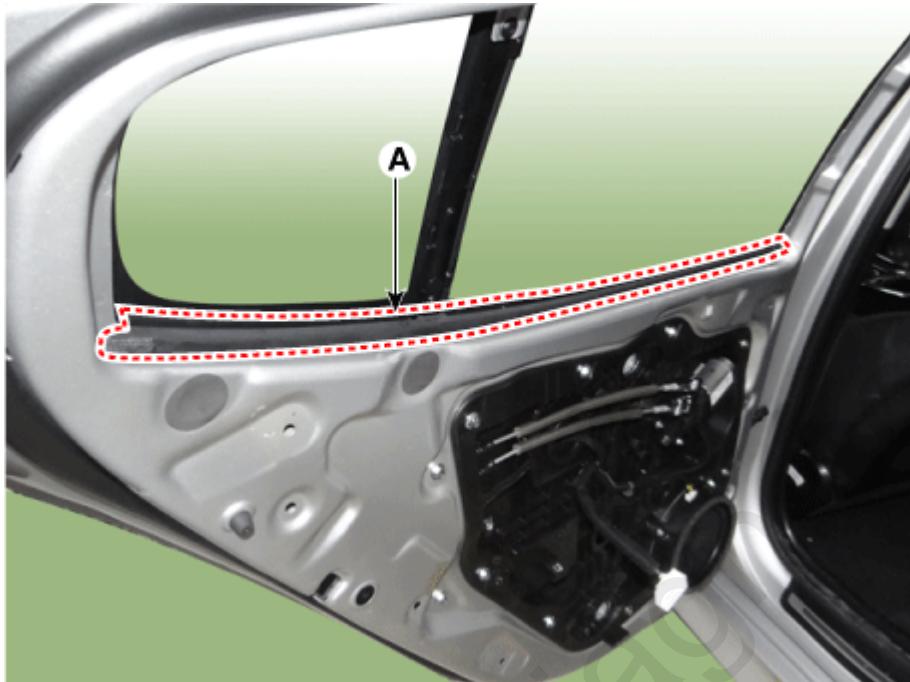

3. Install in the reverse order of removal.

 **Information**

Replace any damaged clips.

* Thanks for your cooperation for the more quality. Please surely rate this document before closing.