

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT


CAUTION

Put on gloves to protect your hands.

Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the rear back armrest (C) after removing the cap(A) and then loosening the bolt (B).

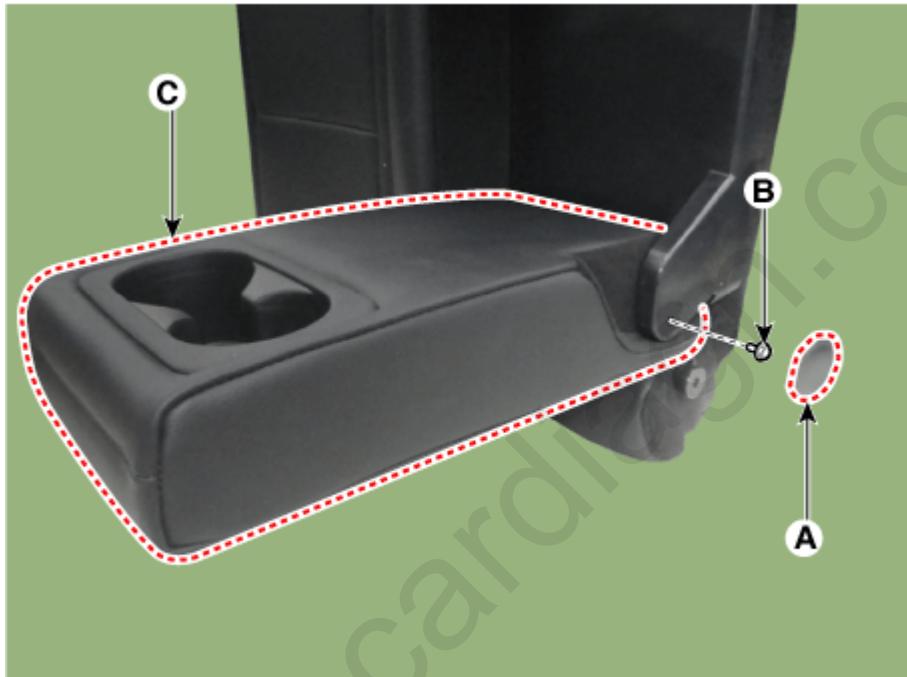

2. Remove the rear seat armrest back board (A).



3. Install in the reverse order of removal.

 **Information**

Replace any damage clips.

*** Thanks for your cooperation for the more quality. Please surely rate this document before closing.**