

Please rate this document after reviewing at the bottom of this page.

## REPLACEMENT

### CAUTION

Put on gloves to protect your hands.


### Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Separate the sunvisor cap (A) by using a remover.



2. Separate the sunvisor (A) after loosening the mounting screw.

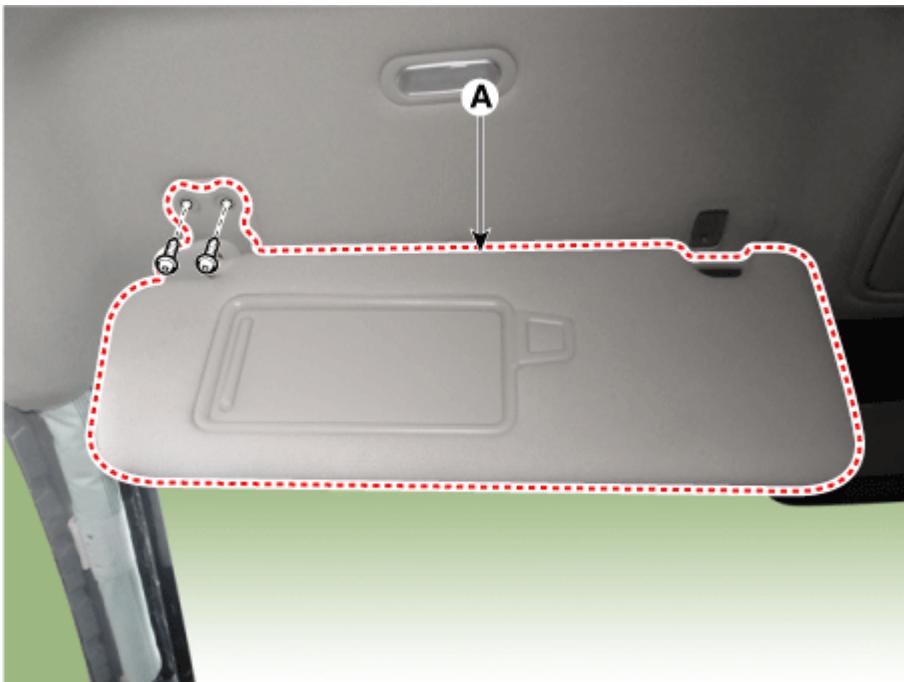

3. Remove the sunvisor after disconnect the connector (A).



4. Install in the reverse order of removal.

 **Information**

Replace any damaged clips.

**\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.**