

Please rate this document after reviewing at the bottom of this page.

REPLACEMENT


CAUTION

Wear gloves to protect hands from injury.


Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Wear gloves to protect hands from injury.

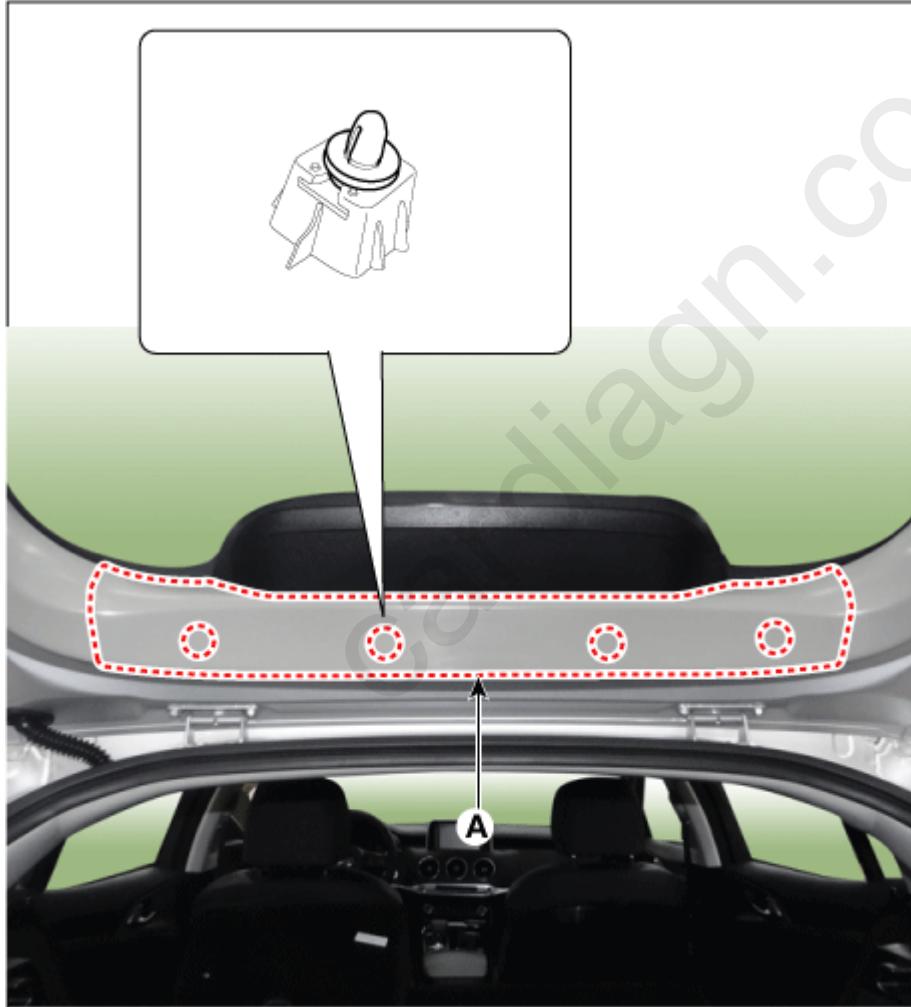

2. Remove the tailgate side trim (A) after loosening the mounting screw.

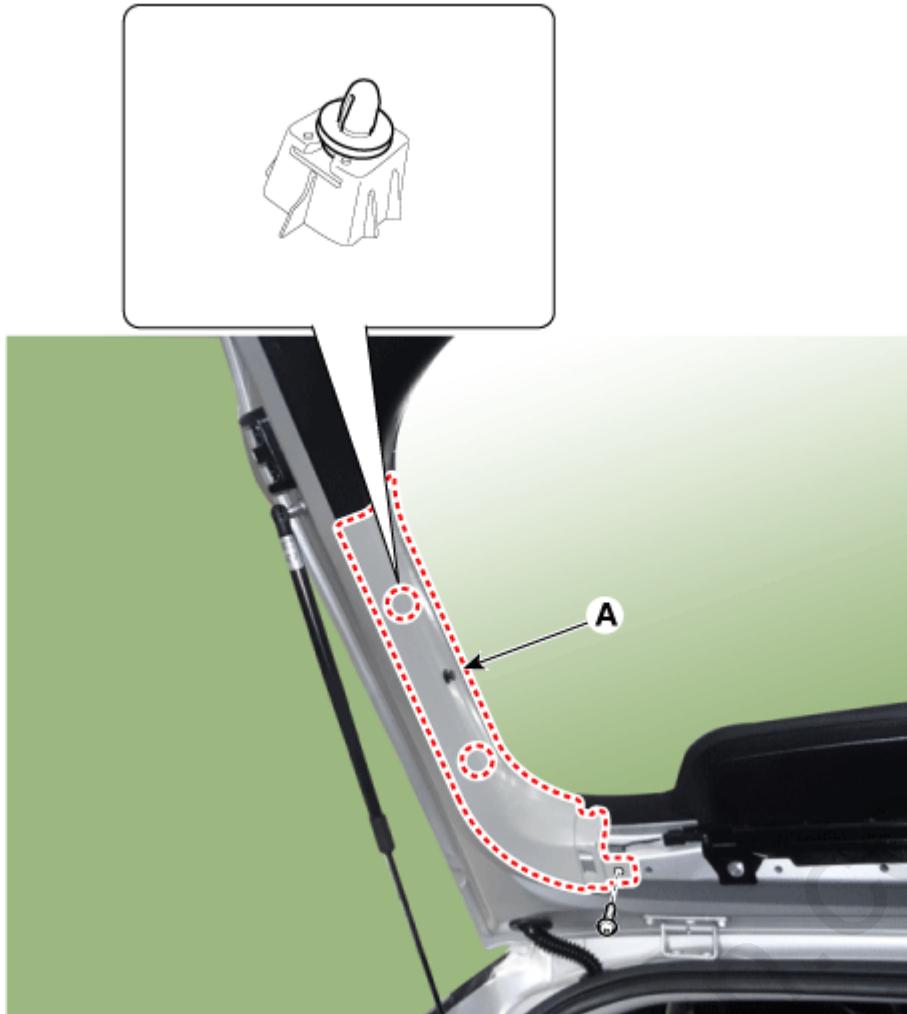

3. Remove the tailgate inside full handle cap (A) by using a remover.




4. Separate the smart tailgate inner switch (A).



5. Remove the smart tailgate inner switch after disconnecting the connector (A).



6. Remove the tailgate trim (A) after loosening the mounting screws.

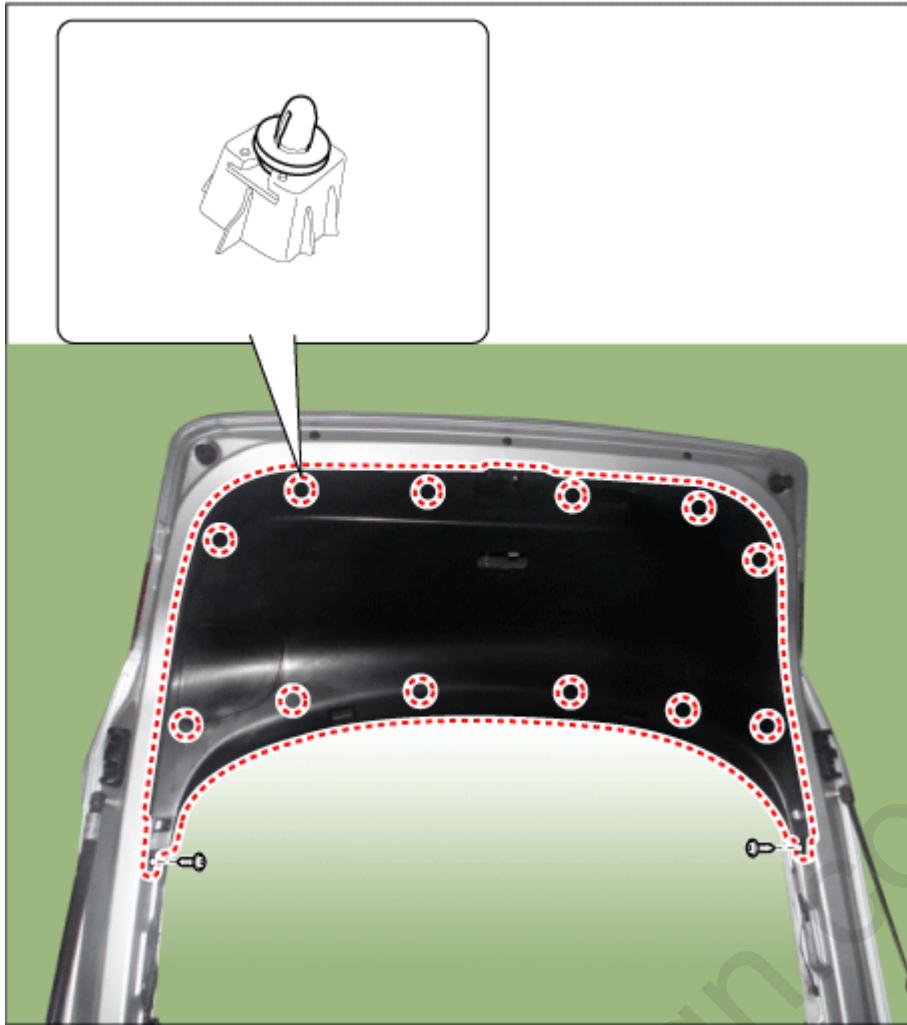

7. Install in the reverse order of removal.

 **Information**

Replace any damaged clips.

* Thanks for your cooperation for the more quality. Please surely rate this document before closing.