




Removal

1. Disconnect the negative (-) battery terminal.
2. Disconnect height sensor connector (A).



3. Remove the height sensor link (A).

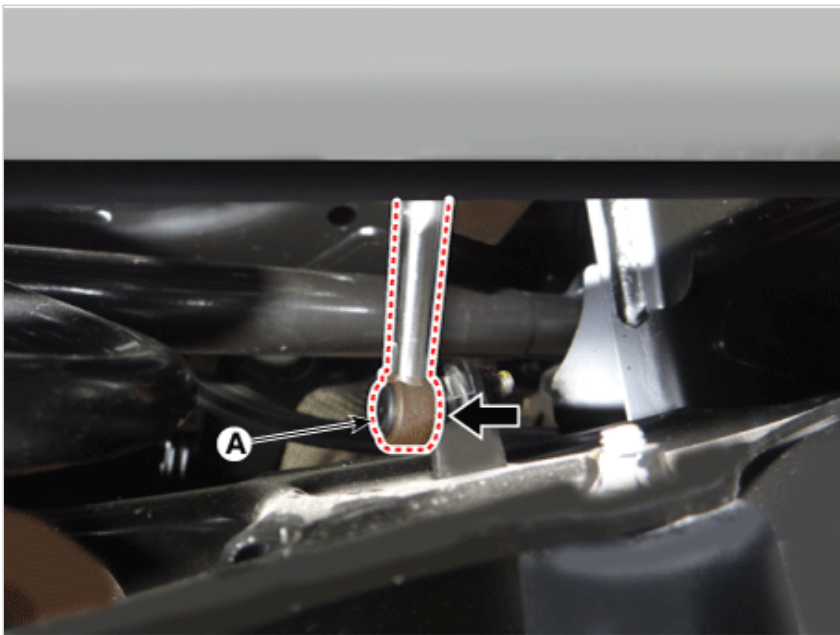

4. Remove the height sensor (A) after loosening the mounting bolt.



Installation

1. Install the height sensor and link.
2. Connect the height sensor connector.
3. Connect the negative (-) battery terminal.