

Please rate this document after reviewing at the bottom of this page.

## INSPECTION


### Tolerance Compensation

Tolerance compensation compensates for the error margins of around view video that occur due to the installation tolerance when the four cameras that comprise the SVM system are installed.

Tolerance compensation must be carried out when the following actions are performed:

- When removing and installing a wide camera.
- When conducting a body task such as the trunk task that causes the focus of the wide camera to change.
- When replacing the door mirror with a wide camera.
- When replacing the around view monitor unit.

### Tolerance Compensation Environments

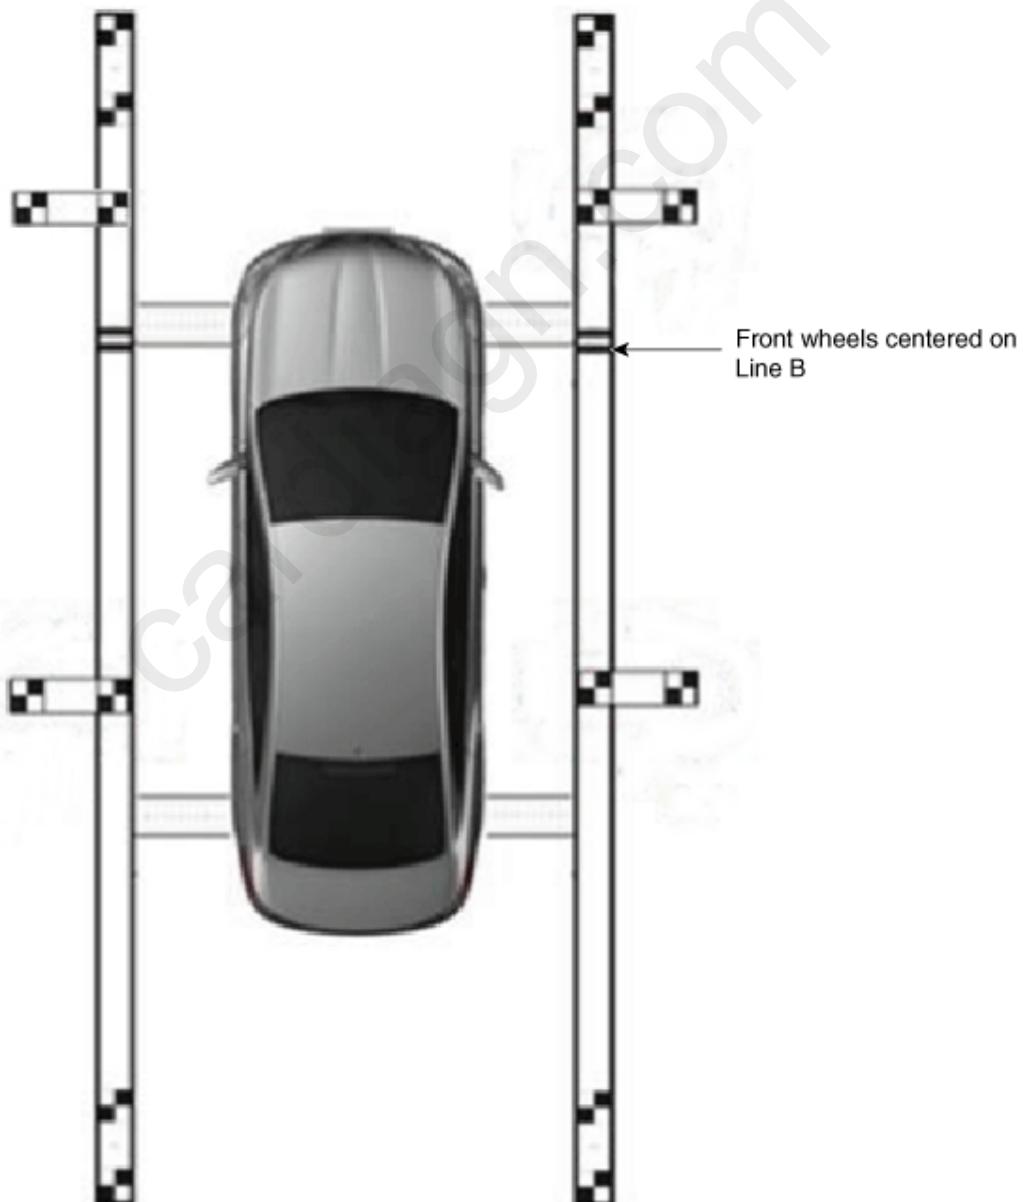

### The Procedure of Manual Tolerance Compensation

1. Prepare in advance as below.
  - Confirm that the car hood, trunk and doors are closed.

- Close the door after getting in on the driver side.
- Switch the ignition to "IGN".
- Unfold all side mirrors.
- Shift the gear to N.
- Check the flashing state of LED indicator lamp in the SVM switch.
- During the advance preparation, do not install exhaust inhaler or other equipment that may block the view of rearview cameras.
- Also, as exhaust fume may block the rearview image, blow off the smoke by using a fan before performing tolerance compensation with IGN ON.
- Engage foot brake or electronic parking brake (EPB) to hold vehicle in place.


2. Before entering tolerance compensation mode, to check normal operation of SVM ECU and cameras, perform the following.

- Check that initial setting screen of SVM is displayed. (Front view image + around view image when shifted to N)
- Check that front, rear, left and right images of around view monitor are properly displayed.
- If images are properly displayed, enter tolerance compensation mode. Otherwise, if images are abnormally displayed or are not displayed, replace relevant part.

3. Install two compensation scales, two compensation reference line boards, and four compensation target boards around the vehicle by referring to the manual provided with the tools.

**⚠ CAUTION**

- Align centers of front wheels to "B-type" on the compensation reference line board.
- Accurately set the location (distance/angle) of the center of white and black compensation board as this is the reference point.
- Front/rear and left/right alignment error margin should be below 1.18 in. (3 cm)
- Rotation error margin when aligning vehicle should be within 1° to left/right.

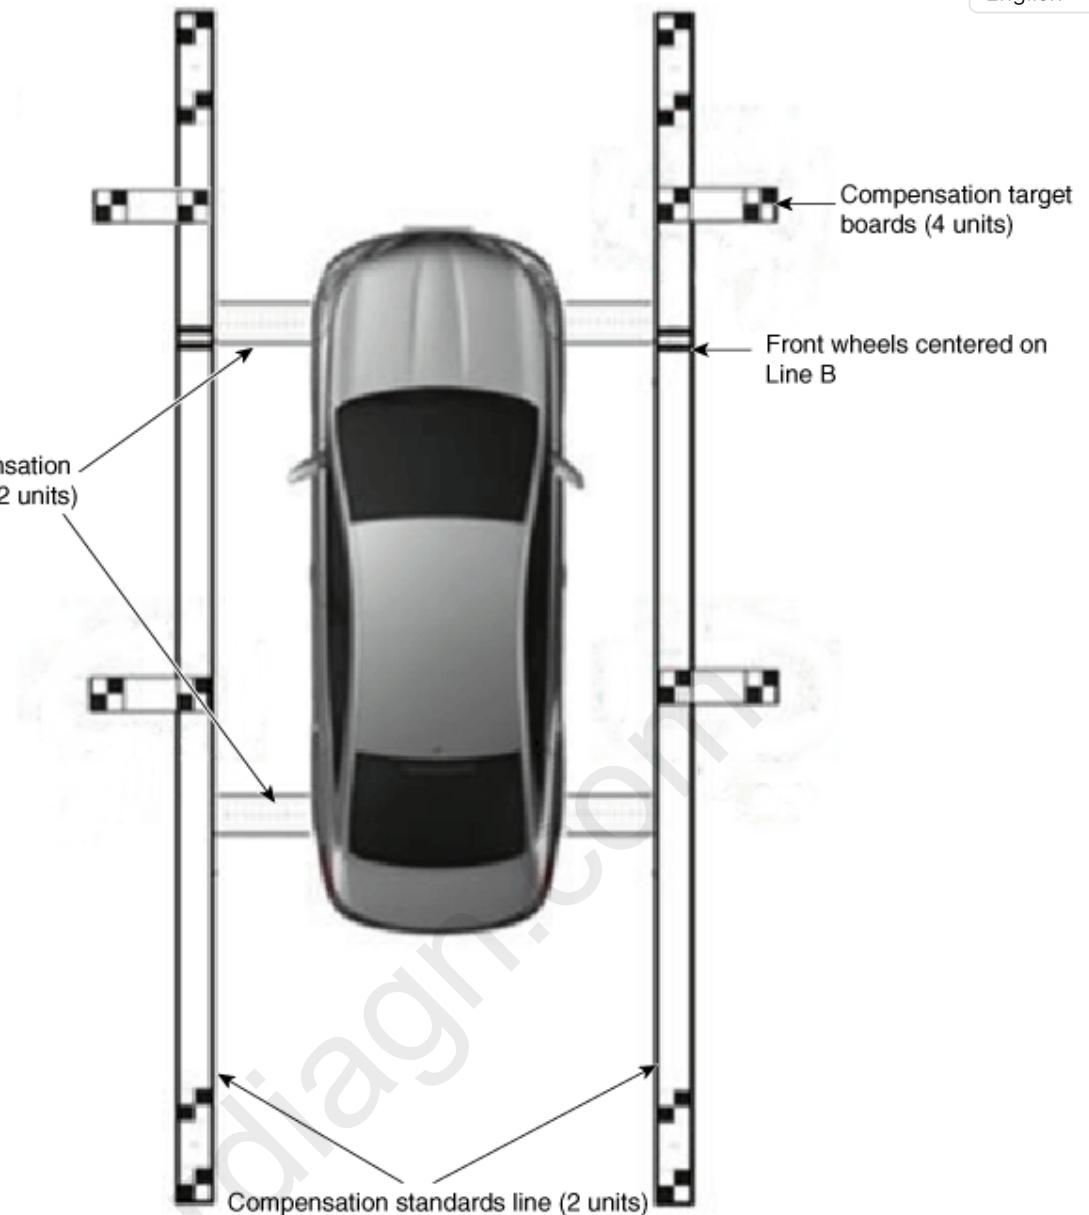

4. Maintain ignition "ON" with vehicle stopped, check that the gear is in P, and engage parking brake even on flat ground.
5. Perform work with SVM switched "ON".
6. Connect the KDS to vehicle.
7. Select vehicle model and system.
8. Enter additional function in KDS.
9. Perform SVM manual tolerance compensation as shown on KDS diagnostic device.

## S/W Management



## Systems

## Components

Unfold All

## ■ Around View Monitor

■ System Identification

■ AVM Calibration

## ■ Blind-Spot Collision Warning-Left

## ■ Blind-Spot Collision Warning-Right

## ■ Multi Function Camera

## ■ Adaptive Front-Lighting System

## ■ Auto Headlamp Leveling

## ■ Active Hood System

## ■ E-Shifter

## ■ Amplifier

## ■ Cluster Module

## ■ Driver Door Module

## ■ Head Up Display

## ■ IBU-BCM



Do not touch any system buttons while performing this function.

## S/W Management



## • AVM Calibration

Purpose	To calibrate image tolerance when module or cameras are replaced.
Enable Condition	1. Engine Off 2. Ignition Switch On 3. Gear Position N, Parking Brake On 4. Bonnet Closed / Trunk Closed / Door Closed / Side View Mirror Open 5. AVM switch Lamp On
Concerned Component	Around View Monitoring(AVM) Module, Ultra-optical cameras
Concerned DTC	B103000, B1030XX
Fail Safe	AVM LED Indicator blinking, set DTC
Etc	- Do not change the status of the power / gear / AVM switch until this function is completed. - Tolerance correction target is required.



Do not touch any system buttons while performing this function.

**Information**

When "SVM tolerance compensation - Manual" is clicked on the KDS diagnostic device screen, the SVM switch indicator lamp will flash.

## S/W Management

### ■ AVM Calibration

#### ● [ AVM Calibration ]

This function is to calibrate the image tolerance in AVM system when AVM control unit or the cameras(front, rear, left, right) on the vehicle is replaced.

##### ●[ Condition ]

1. Check engine hood/trunk/doors closed and outside mirrors unfolded.
2. Engine stop, IG ON, Gear position 'N', Parking Brake ON.
3. AVM system button 'ON'.
4. Install the AVM calibration target. (Refer to Shop Manual)

If this function is not performed when AVM control unit is replaced, AVM switch lamp will blink and DTC(B103000 : No Camera Tolerance Correction) will be set.

Click **OK** to proceed to next step.



OK

Cancel



Do not touch any system buttons while performing this function.

## S/W Management

### ■ SVM Calibration

#### ● [ SVM Calibration Information ]

1. Overlap the blinking cross box(+) on AVN monitor of vehicle to calibration coordinates of calibration target by using ▶, ▶▶ and press [OK] button.
2. Overlap the other cross boxes to calibration coordinates of calibration target with same method and press [OK] button, then press [Update SVM] button to proceed to next camera.
3. With same method as front camera, perform the calibration procedure in order of rear → left → right camera.
4. Monitor the SVM update process with monitor after press [Update SVM] button when last camera calibration procedure is complete.
5. Check the proper image displaying on monitor.

※ You can re-do the calibration procedure with [Reset] button.



Reset

Update SVM

Close




Do not touch any system buttons while performing this function.

#### Information

- Before matching calibration points: "+" green light flashes
- When clicking [OK] after matching calibration points: "+" red light ON
- Match four frontal calibration points, and then perform calibration in the order from rear → left → right.


Screen calibration order: ① Top left → ② Bottom left → ③ Top right → ④ Bottom right

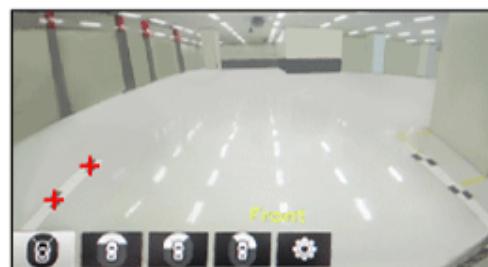


&lt;Front&gt;



&lt;Rear&gt;

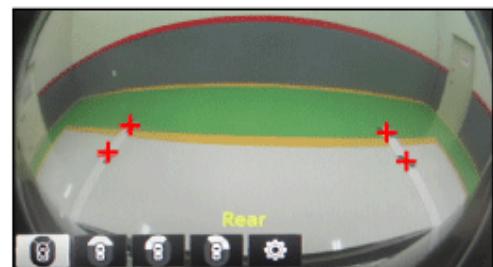

&lt;Right&gt;

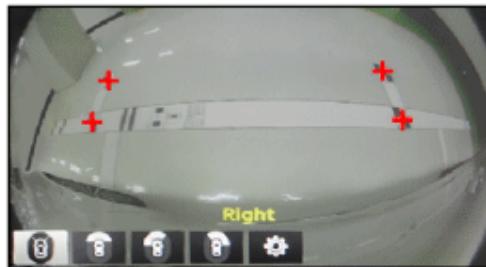

&lt;Left &gt;



10. To confirm completion of calibration, check the vehicle and calibration line on AVN monitor and click [OK].  
If calibration has not been properly performed, click [Cancel] and reenter calibration points.

\* Thanks for your cooperation for the more quality. Please surely rate this document before closing.