



Removal

Multimedia Jack


⚠ CAUTION

Put on gloves to protect your hands.


NOTICE

- When prying with a flat-tip screwdriver or use a prying trim tool, wrap it with protective tape, and apply protective tape around the related parts, to prevent damage.
- Use a plastic panel removal tool to remove interior trim pieces to protect from marring the surface.
- Take care not to bend or scratch the trim and panels.


1. Disconnect the negative (-) battery terminal.
2. Remove the console complete assembly.
(Refer to Body - "Floor Console Assembly")
3. Remove the front cover (A) after loosening the mounting screws.

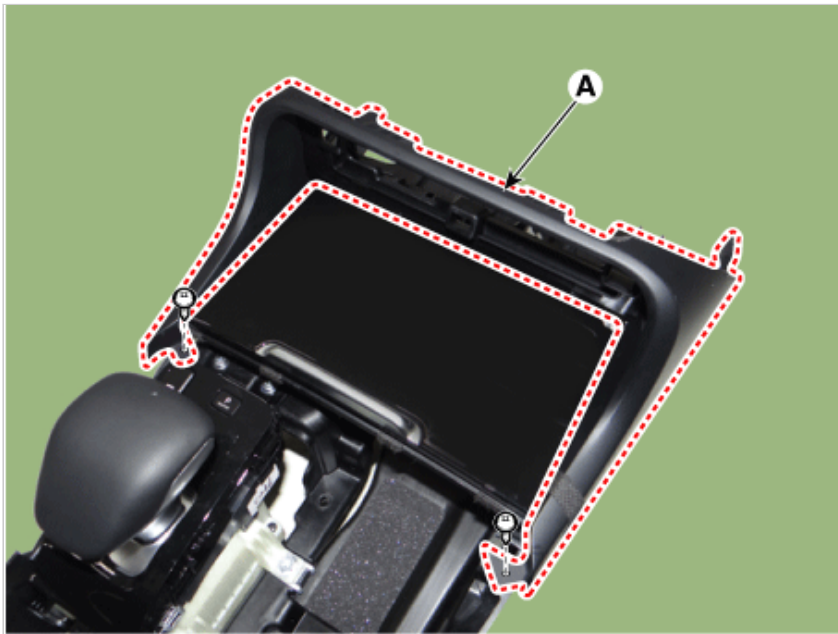


4. Remove the floor console tray (A).

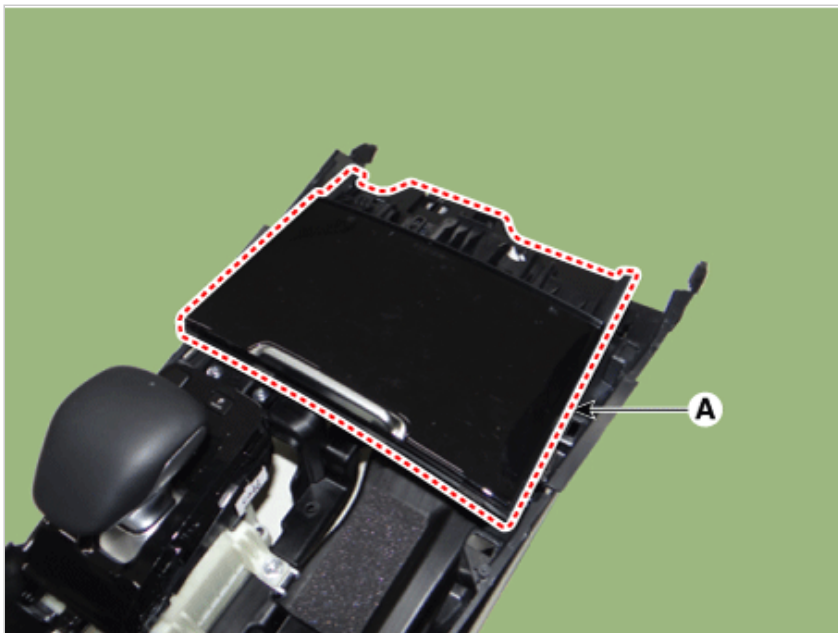

5. Disconnect the multimedia jack connectors (A).

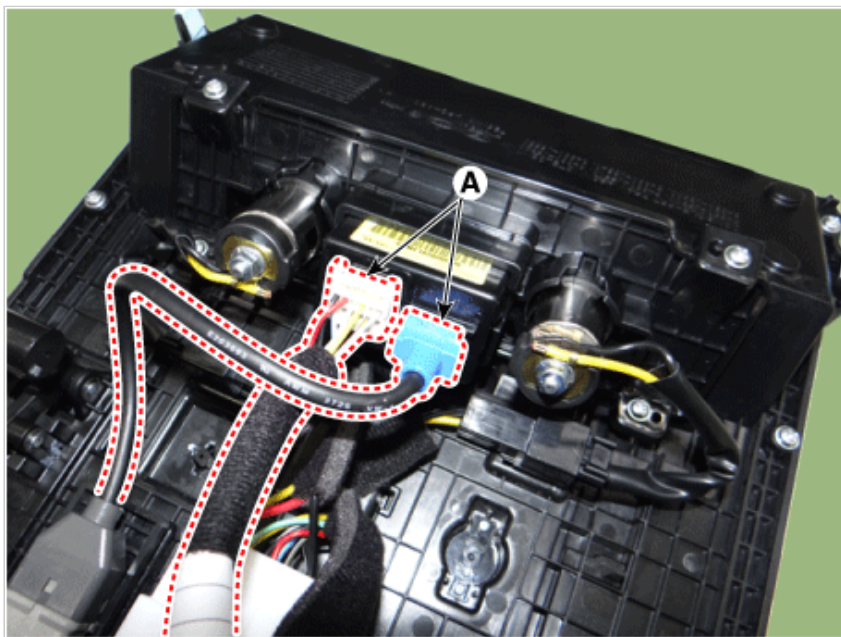

6. Remove the multimedia jack (A) after releasing the fixed hooks.

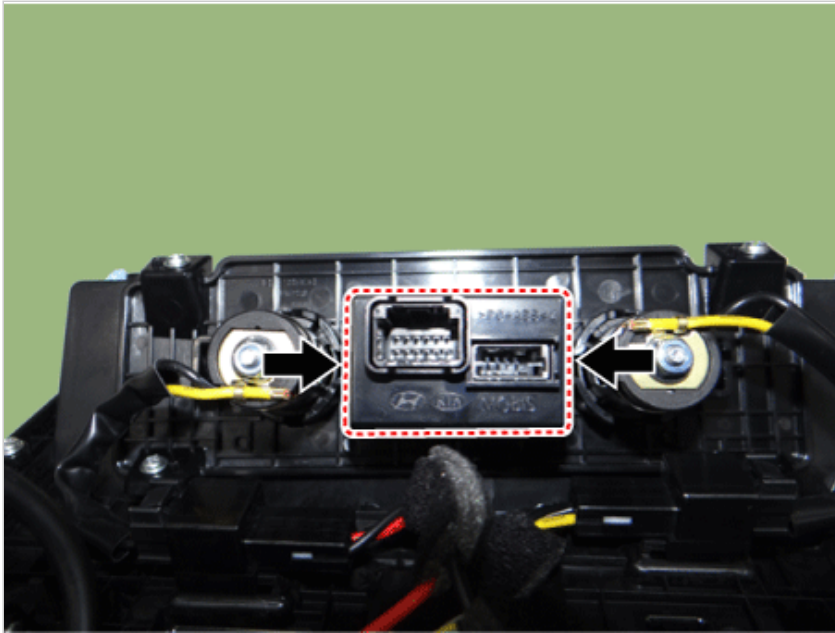

USB Charger


1. Disconnect the negative (-) battery terminal.
2. Remove the rear console cover.
(Refer to Body - "Rear Console Cover")
3. Disconnect the USB charger connector (A).



4. Disconnect the rear heater&A/C control unit connector (A).



5. Remove the USB charger (A) after loosening the mounting screws.

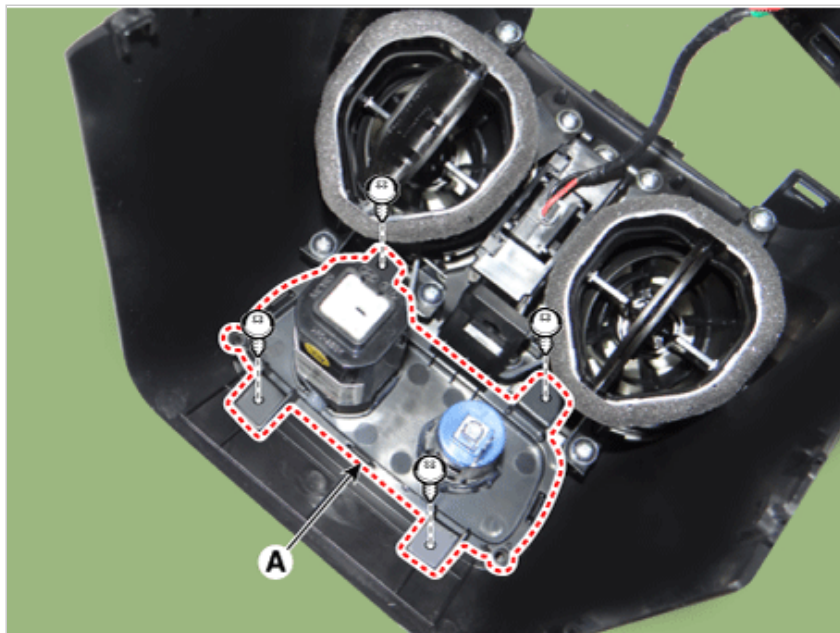

Installation

Multimedia Jack

1. Install the multimedia jack.
2. Connect the multimedia jack connector.
3. Install the floor console tray.
4. Install the front cover.
5. Install the console complete assembly.
6. Connect the negative (-) battery terminal.

USB Charger

1. Install the USB charger.
2. Connect the rear heater&A/C control unit connector.
3. Connect the USB charger connector.
4. Install the rear console cover.
5. Connect the negative (-) battery terminal.