





Replacement

1. Disconnect the negative (-) battery terminal.
2. Remove the glove box hoursing.
(Refer to Body - "Glove Box Hoursing")
3. Remove the shower duct (A) after loosening the screw.

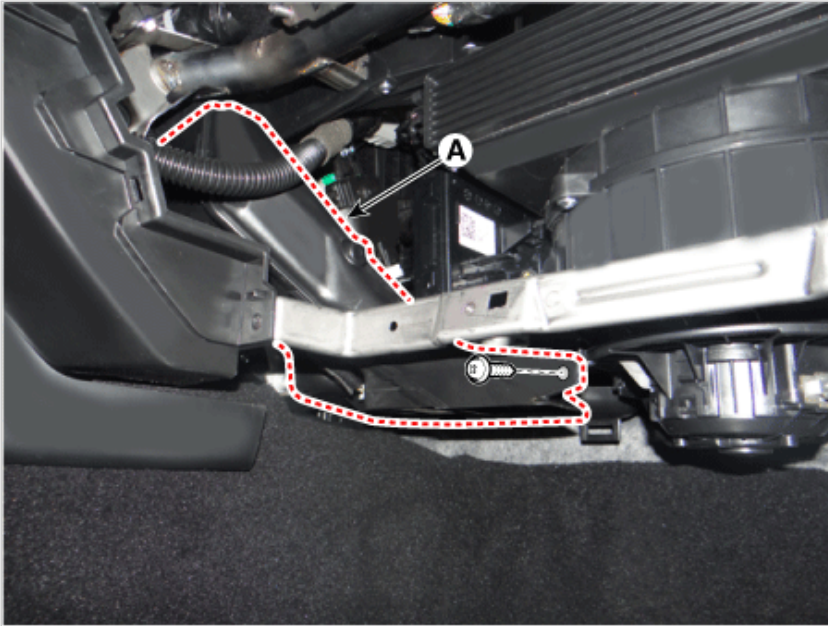

4. Disconnect the heater control unit connectors (A).
5. Remove the heater control unit (B) after loosening the screws.

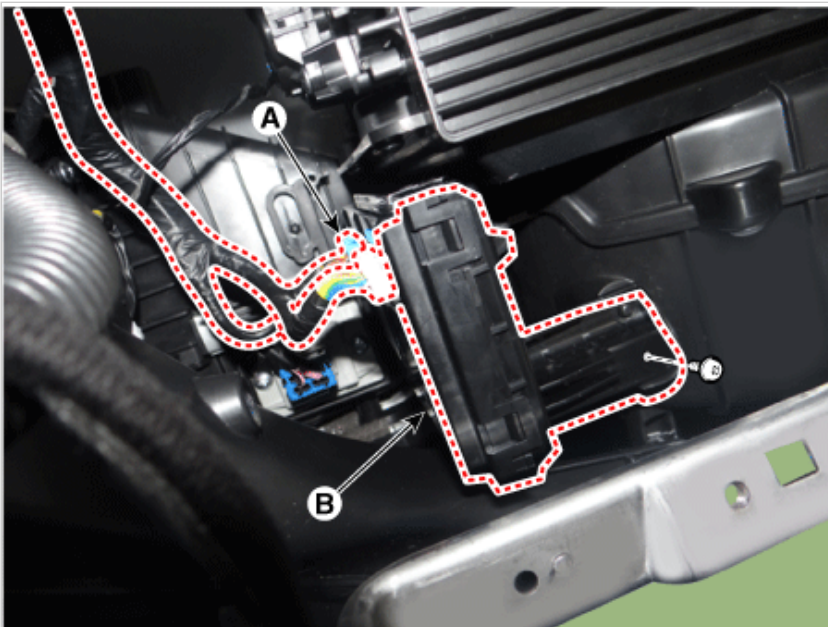

6. Install in the reverse order of removal.