




Replacement

Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the C pillar molding (A) by using a remover.

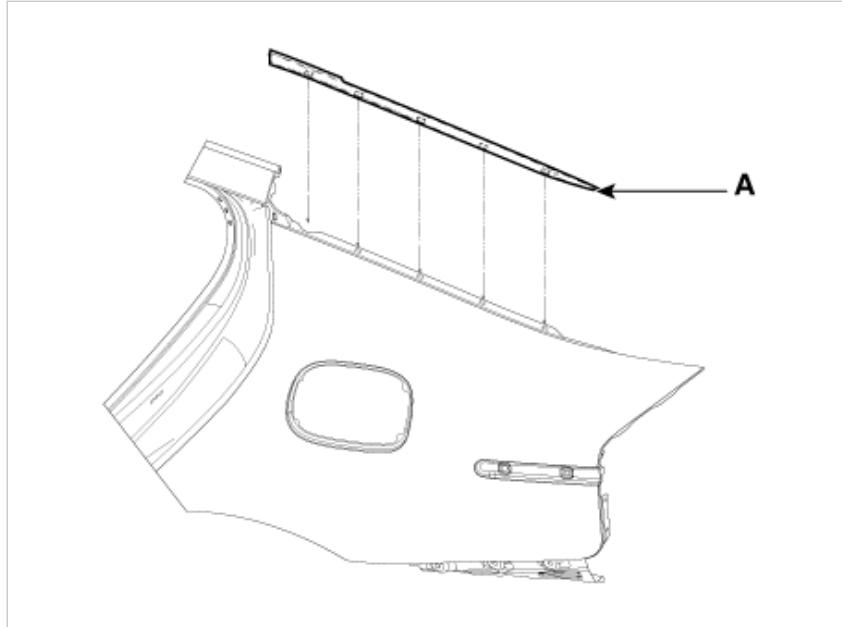

2. Install in the reverse order of removal.

Information

Replace any damaged clips.