



Replacement

⚠ CAUTION

Put on gloves to protect your hands.


ℹ Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Be careful not to bend or scratch the trim and panels.

1. Remove the fender garnish.

(Refer to Body Side Molding - "Fender Garnish")

2. Remove the side sill molding (A) by using a remover.

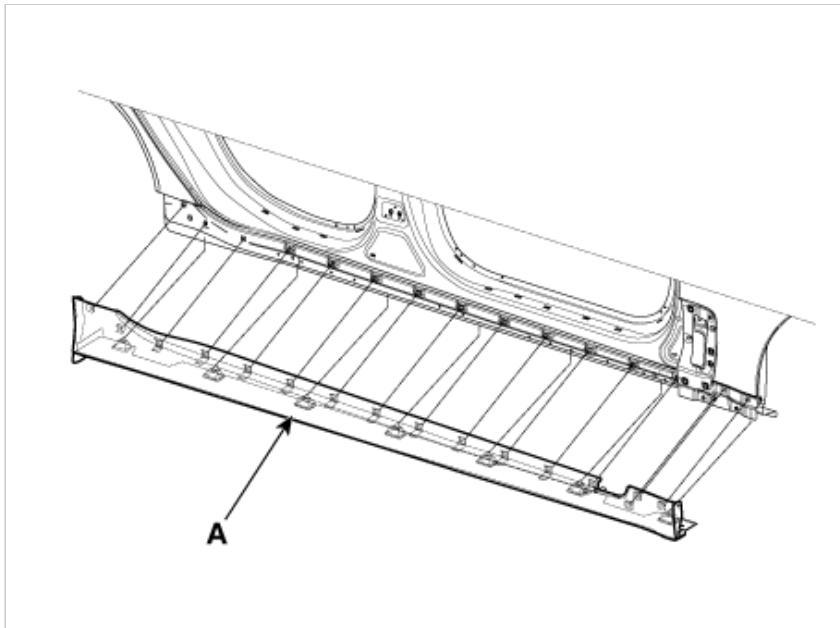

3. Install in the reverse order of removal.

ℹ Information

Replace any damaged clips.