



Replacement


CAUTION

Put on gloves to protect your hands.


Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

- Remove the crash pad side cover [LH] (A) by using a remover.

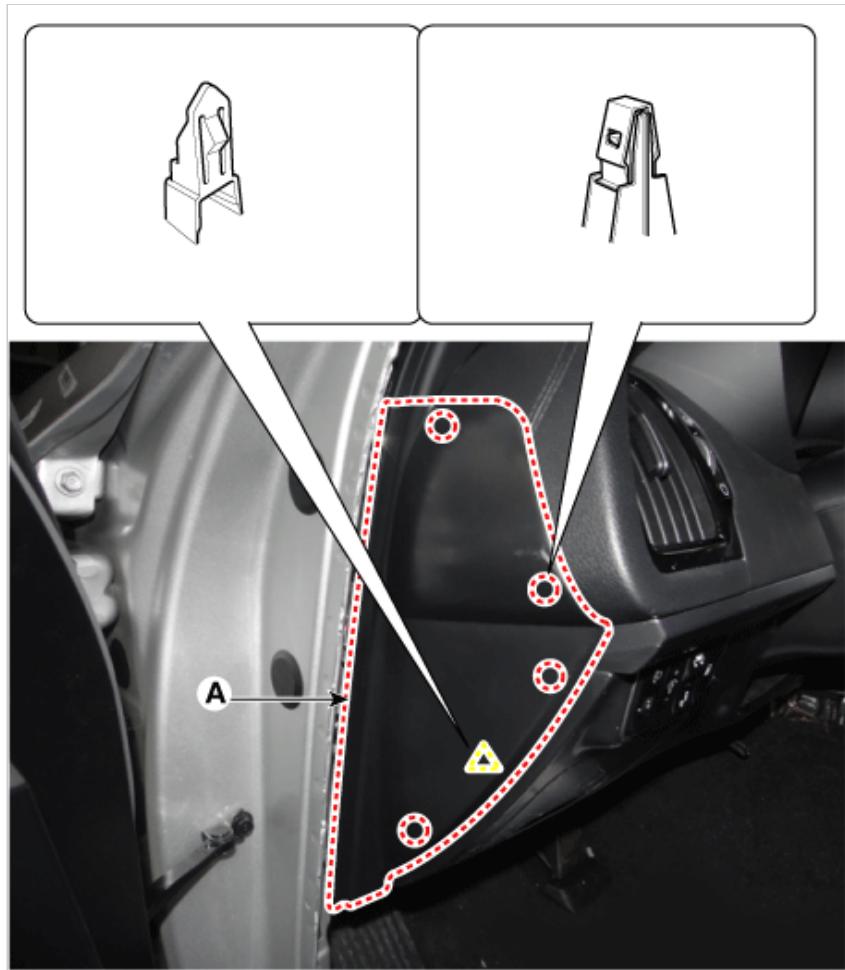

- Separate the crash pad lower panel (A) after loosening the bolts and screws.

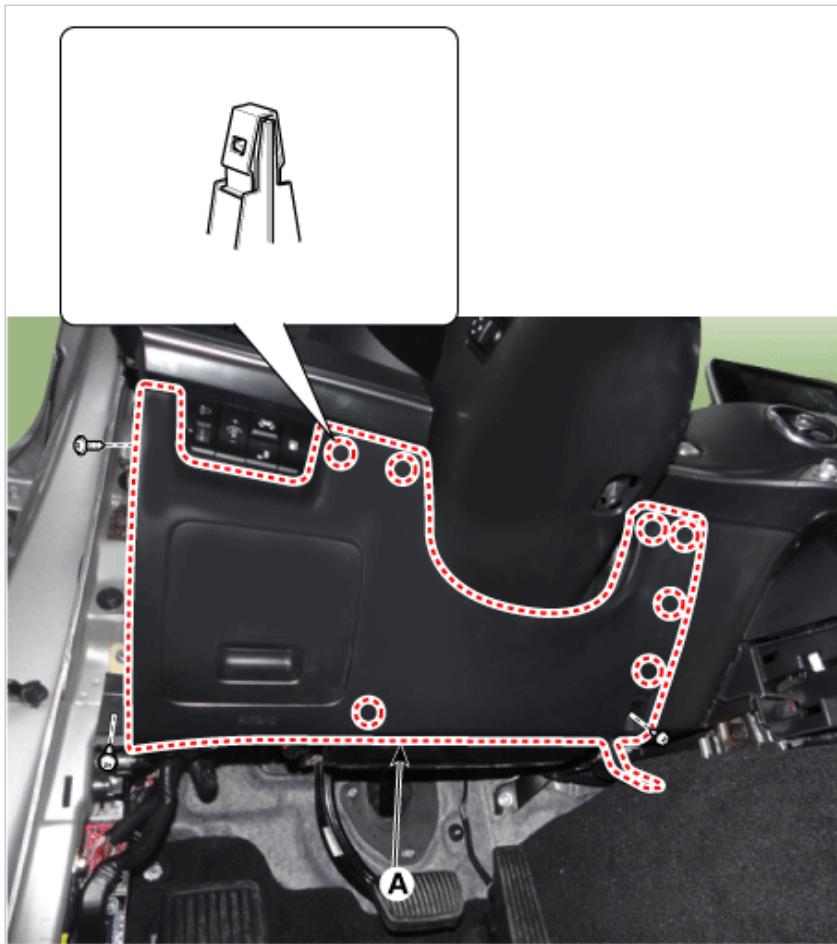

3. Disconnect the crash pad lower switch connector (A).



4. Install in the reverse order of removal.

Information

- Make sure the connector are connected in properly.
- Replace any damaged clips.