



Replacement

⚠ CAUTION

Put on gloves to protect your hands.


ℹ Information

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Remove the front door trim.

(Refer to Front Door - "Front Door Trim")

2. Remove the front door belt inside weatherstrip (A).

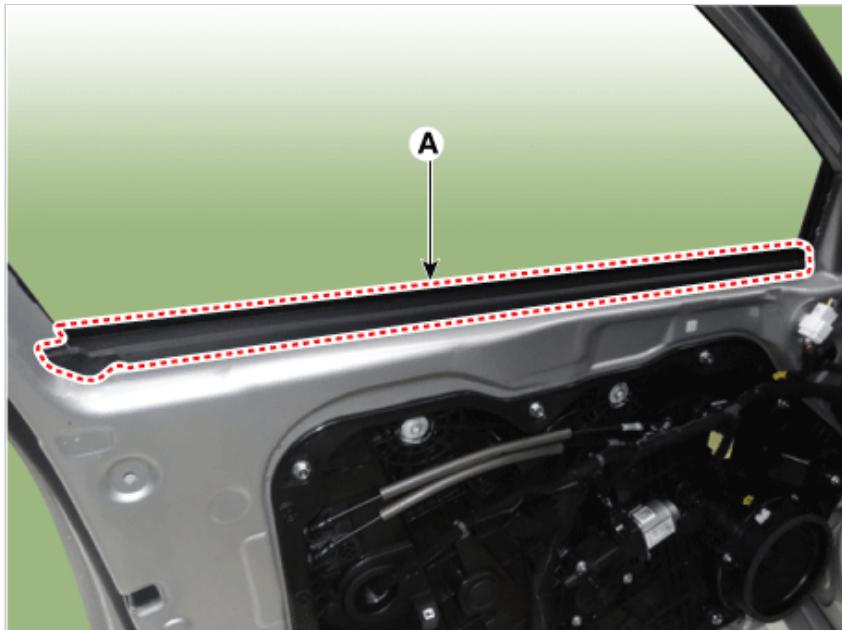

3. Install in the reverse order of removal.

ℹ Information

- Make sure the connector is connected properly.
- Make sure the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.