



Replacement


CAUTION

Put on gloves to protect your hands.

NOTICE

- When prying with a flat-tip screwdriver or using a prying trim tool, wrap protective tape around the tool and related parts to prevent damage.
- Be careful not to scratch the door trim and other parts.

1. Remove the front door inside handle cap (A) by using a remover.

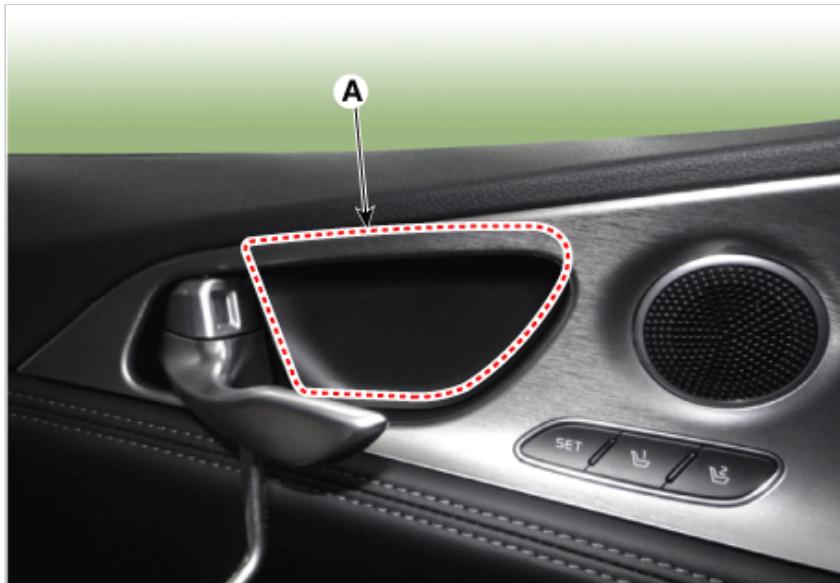

2. Remove the front door inside pull handle cap (A) by using a remover.



3. Separate the front door armrest lower cover (A).




4. Remove the front door trim (A) after loosening the mounting screws.



5. Remove the front door inside handle cage (A).



6. Disconnect the front door integration connector (A).

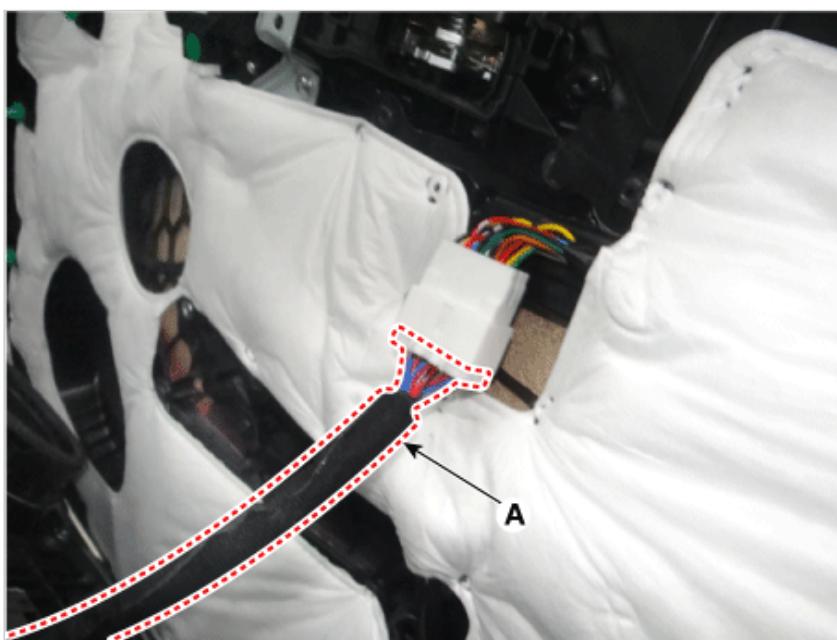

7. Install in the reverse order of removal.

Information

- Make sure that the connector is connected properly.
- Make sure that the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.