




Replacement

1. Remove the rear door trim.
(Refer to Rear Door - "Rear Door Trim")
2. Remove the rear door belt inside weatherstrip (A).

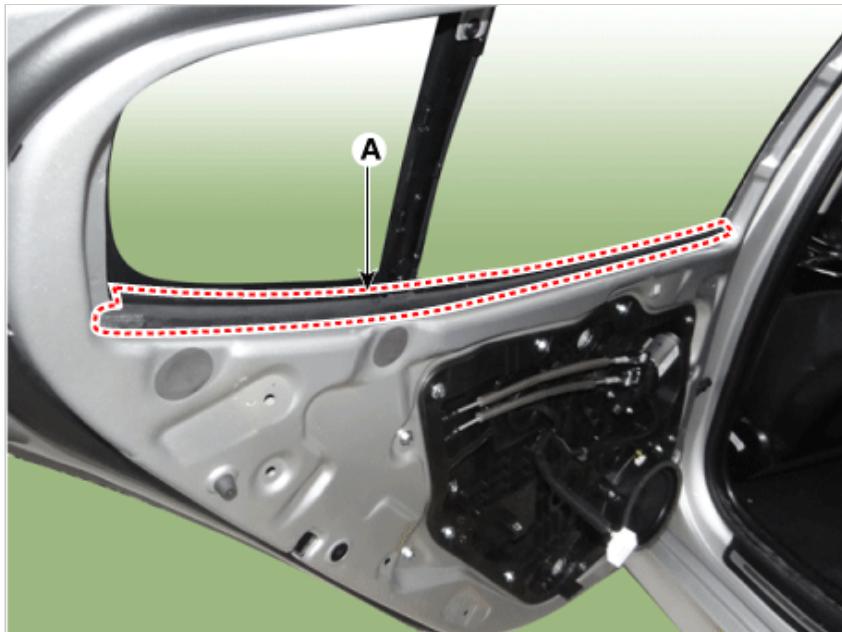

3. Install in the reverse order of removal.

Information

Replace any damaged clips.