




## Replacement

1. Remove the rear door trim.  
**(Refer to Rear Door - "Rear Door Trim")**
2. Remove the rear door inside handle (A) after loosening mounting screws.

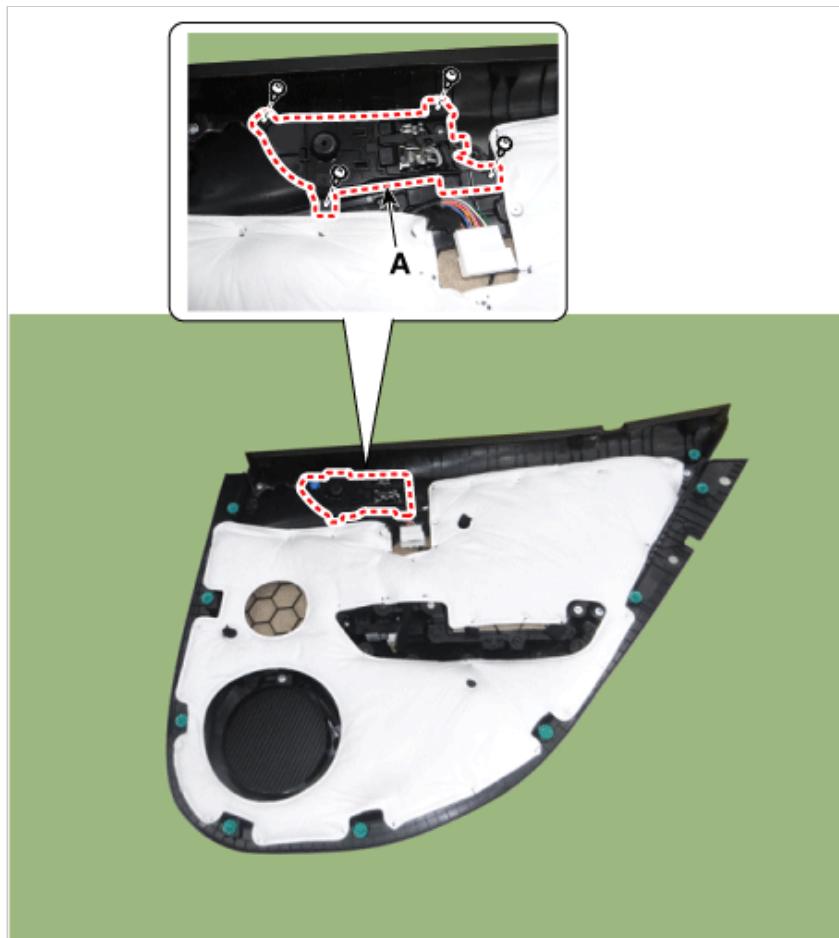

3. Install in the reverse order of removal.

### **Information**

- Make sure that the door locks/unlocks and opens/closes properly.
- Replace any damaged clips.