




Removal

CAUTION

- When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components.
- When removing the interior trim pieces, use a plastic panel removal tool not to damage the surface.
- Be careful to store and handle the crash pad when removing/installing because lubricant and oil can leave a stain on the trim.

- Disconnect the negative (-) battery terminal.
- Remove the crash pad passenger side panel.
(Refer to Body - "Crash Pad Center Panel")
- Remove the audio front monitor (A) after loosening the mounting screws.

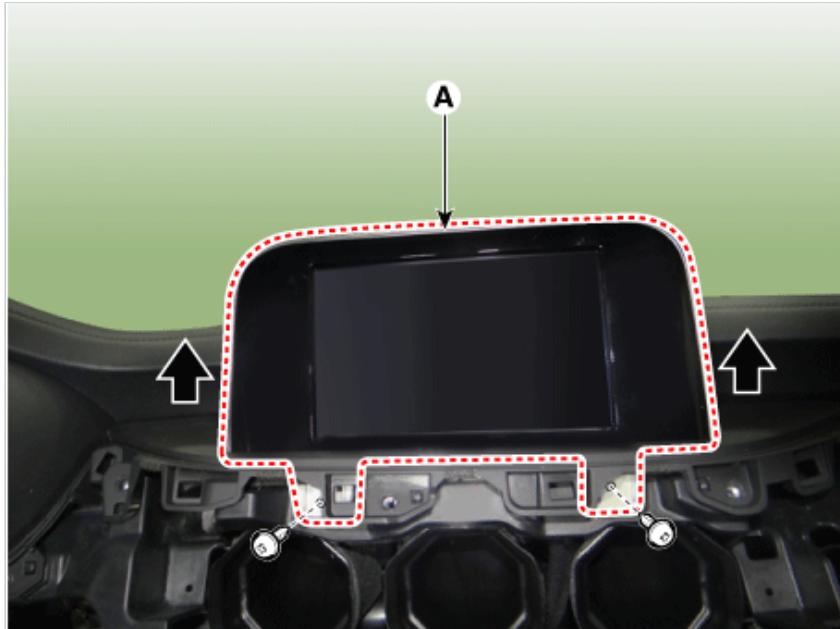

- Disconnect the audio front monitor connectors (A).



Installation

- Connect the audio front monitor connectors.
- Install the audio front monitor.

3. Install the crash pad passenger side panel.
4. Connect the negative (-) battery terminal.

NOTICE

- Make sure that the connectors are connected properly.
- Check the audio system.